


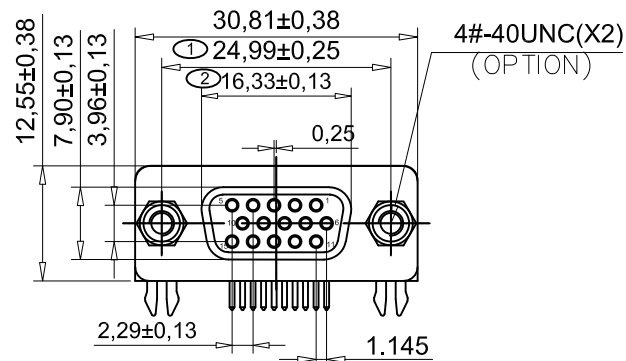


1 2 3 4 5 6 7 8 9

A

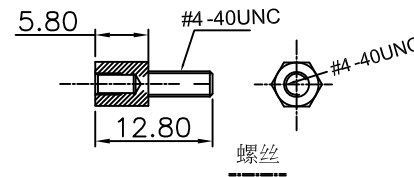

B

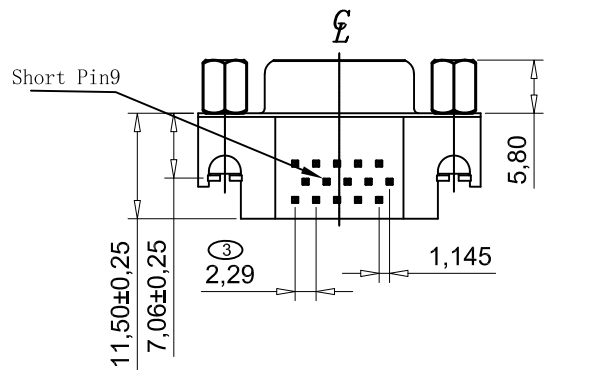

C

D

NOTES

- MATERIAL:**
Housing:PBT, UL 94V-0, Color:BLUE/BLACK.
Terminal:Brass.
Shell:SPCC.
Boardlock:SPCC.
rivet:Copper Alloy
Screw:SPCC
- FINISH:**
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
rivet:Nickel Plated.
Screw:Nickel Plated.
- VGA**
1.1 Voltage: 250 VAC(RMS) Max.
1.2 Current Rating: 3 Ampere per Contact
1.3 Contact Resistance: 25 Milliohms Max.
1.4 Insulation Resistance: 5000 Megohms Min.
1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
1.6 Total Mating Force: 6.0 Kgf Max.
1.7 Total Unmating Force: 1.2 Kgf Min.
1.8 Operating Temperature: -25°C to +85°C

※ SIGN "X" IS IMPORTANCE DIMENSION

PART NO:

KDSA2-15 F -1 N X-X

PIN:
15

極性:
F:母座


鍍金厚度:
1:G/F

鉄殼電鍍:
N:線

螺絲:
O:叉鎖螺絲
N:腳鎖不附螺絲
Y:腳鎖螺絲
F:腳附螺絲

塑膠:
B:BLACK
L:BLUE

E

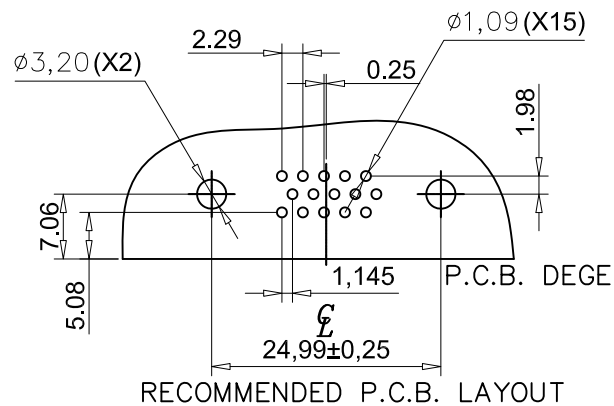

F

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
D-SUB 90° 15PIN 母座 5.08mm

單位: mm	繪圖	設計	審核	核准	料號:KDSA2-15F-1NX-X
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KDSA2-15F-1NX-X-1 DRAWING NO
日期: 2009/3/9					版本: REV. 0

版本	修改事項	修改日期

1 2 3 4 5 6 7 8 9