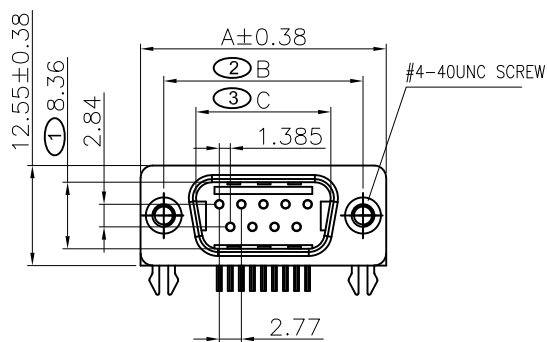


RECOMMENDED P.C.B LAYOUT

NO. POS	A±0.38	B±0.25	C±0.25
9PIN	30.80	24.99	16.92
15PIN	39.20	33.32	25.25
25PIN	53.10	47.04	38.96
37PIN	69.40	63.50	55.42

SPECIFICATIONS

- D-SUB
- Voltage: 250 VAC(RMS) Max.
- Current Rating: 3 Ampere per Contact
- Contact Resistance: 25 Milliohms Max.
- Insulation Resistance: 5000 Megohms Min.
- Dielectric Withstanding Voltage: 1000 VAC(RMS)
- Total Mating Force: 4.0 Kgf Max.
- Total Unmating Force: 1.0 Kgf Min.
- Operating Temperature: -25°C to +85°C

NOTES

- MATERIAL:**
Housing: PBT,UL 94V-0, Color:Black/Blue.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:SPCC.
Rivet:Copper Alloy.
- FINISH:**
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Rivet:Nickel Plated.
Screw:Nickel Plated.

※ SIGN "X" IS IMPORTANCE DIMENSION

PART NO:

KDSB1- XX M -1 N X-X

PIN:
09/15/25/37

極性:
M:公座
鍍金厚度:
1:G/F
鉄殼電鍍:
N:鍍

螺絲:
O:叉鎖螺絲
N:铆合不附螺絲
F1:铆附鐵螺絲4.8*11.8
F2:铆附鐵螺絲5.8*12.8
F3:铆附銅螺絲4.8*11.8
F4:铆附銅螺絲5.8*12.8
Y1:铆鎖鐵螺絲4.8*11.8
Y2:铆鎖鐵螺絲5.8*12.8
Y3:铆鎖銅螺絲4.8*11.8
Y4:铆鎖銅螺絲5.8*12.8

塑膠:
B:BLACK
L:BLUE

0:叉鎖	N:铆合	Y:铆合鎖	F:铆合附螺絲

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
D-SUB 90° 公座 8.08mm

單位: mm	繪圖	設計	審核	核准	料號:KDSB1-XXM-1NX-X
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KDSB1-XXM-1NX-X-1
日期: 2009/7/10					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0