

1. VGA
1.1 Voltage: 250 VAC(RMS) Max.
1.2 Current Rating: 3 Ampere per Contact
1.3 Contact Resistance: 25 Milliohms Max.
1.4 Insulation Resistance: 5000 Megohms Min.
1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
1.6 Total Mating Force: 6.0 Kgf Max.
1.7 Total Unmating Force: 1.2 Kgf Min.
1.8 Operating Temperature: -25°C to +85°C




NOTES

1. MATERIAL:
Housing(UPPER):PBT, UL 94V-0, Color:Black.
Housing(LOWER):PBT, UL 94V-0, Color:Black.
Housing(Connecting seat):PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.


※ SIGN “(X)” IS IMPORTANCE DIMENSION

PART NO:

KDSDB-15 F 1-N X B X- A
極性: F:母座/母座
鍍金厚度: 1:G/F
鐵殼電鍍: N:銀
N: 鍍金不附螺絲
Y: 鍍金鎖螺絲
F: 鍍金附螺絲
連接座全包式
N: 鍍金不附螺絲
Y: 鍍金鎖螺絲
F: 鍍金附螺絲
塑膠: B:黑色
S:15.88mm
M:19.05mm

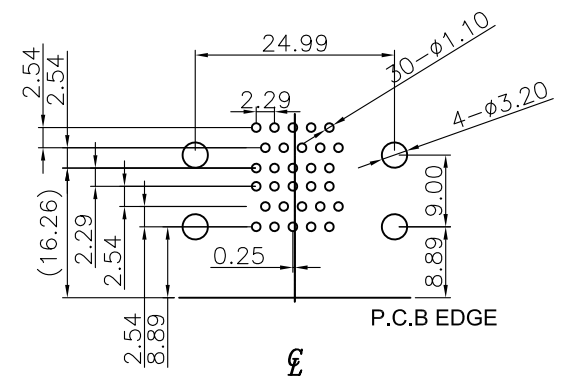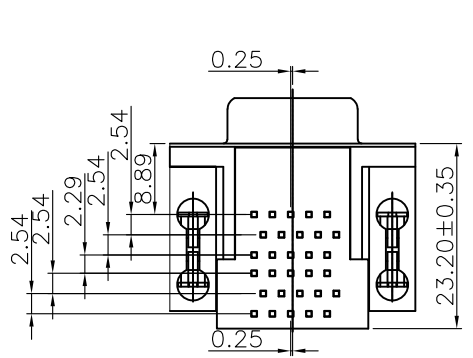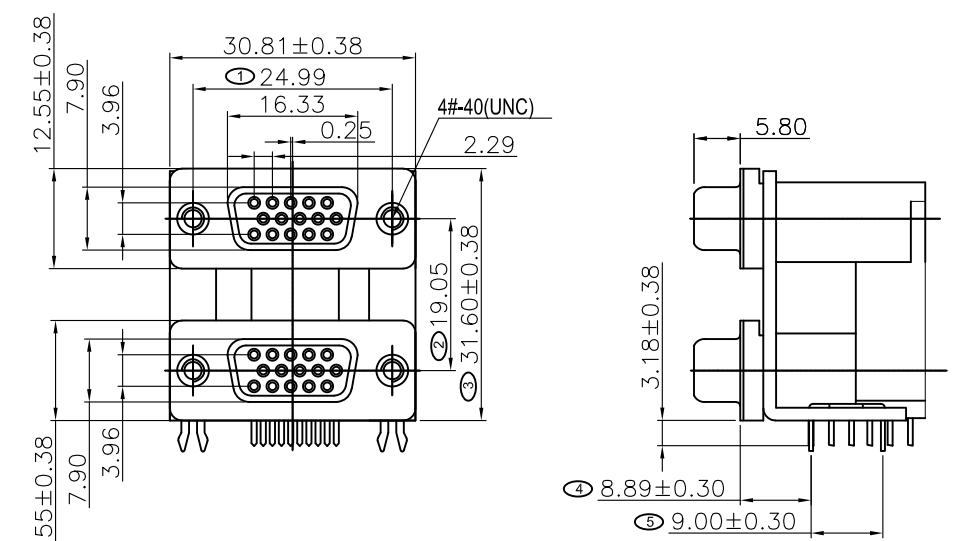

RECOMMENDED P.C.B LAYOUT

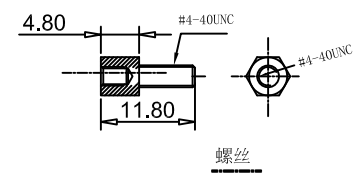

KEM 奇速科技有限公司 Qi-Speed Technology CO., LTD.				產品名稱: PRODUCT NAME D-SUB 15母对D-SUB 15母(8.89) 19.05铆合 连接座全包式			
單位: mm				繪圖	設計	審核	核准
比例:				DRAWING	DESIGNED	CHECKED BY	APPROVAL BY
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13				JOHNY	JOHNY	LUKE	JAMES
日期: 2014/8/18				料號:KDSDB-15F1-NXBX-A PART NUMBER			
圖號:KDSDB-15F1-NXBX-A-1 DRAWING NO				版本: REV. 0			

版本	修改事項	修改日期
----	------	------