
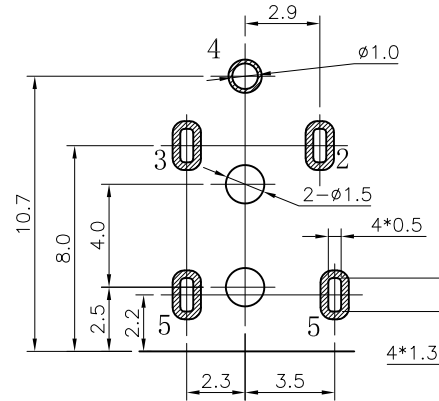




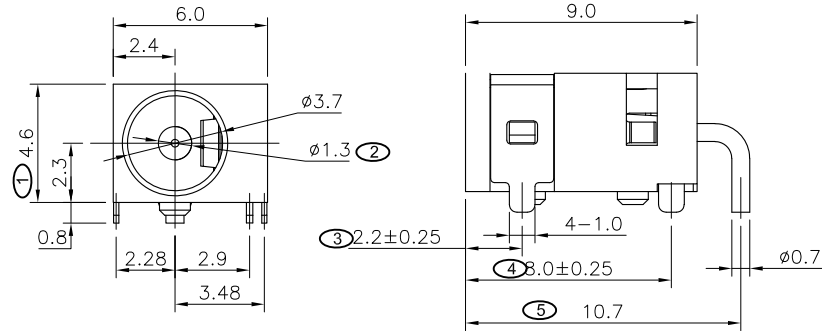


P.C.B LAYOUT
TOP VIEW

SPECIFICATION


1. Rating : DC 12V 3A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

※ SIGN "X" IS IMPORTANCE DIMENSION





RECOMMENDED PLUG

SCHEMATIC



⑥	STOPPER	1	SUS301	
⑤	CONTACT FOOT	1	BRASS	Ag
④	CENTER PIN	1	BRASS	Ni
③	CURVE PIECE	1	BRASS	Ag
②	SPRING	1	BRONZE	Ag
①	HOUSING	1	LCP	
NO	PART NAME	QTY	MATERIAL	PLATING/COL



KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
DC POWER JACK

單位 : mm



比例 :

公差 : .X ± 0.38
.XX ± 0.25
.XXX ± 0.13

日期 : 2021/9/9

繪圖	設計	審核	核准
DRAWING	DESIGNED	CHECKED BY	APPROVAL BY
JOHNY	JOHNY	LUKE	JAMES

料號:KDCD-01960-1.3
PART NUMBER

圖號:KDCD-01960-1.3-1
DRAWING NO

版本: REV. 0

版本	修改事項	修改日期
----	------	------