
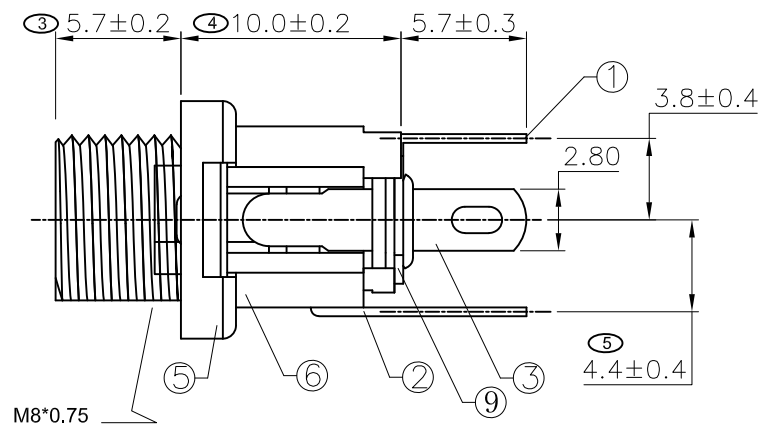
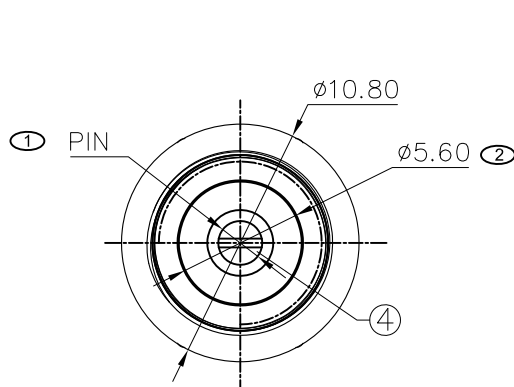

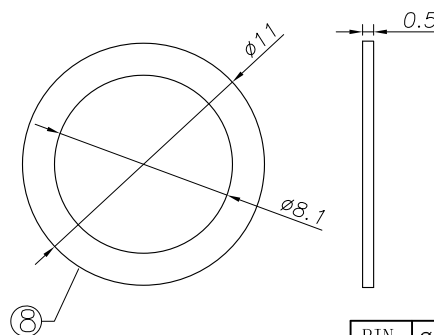


T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-sided view)

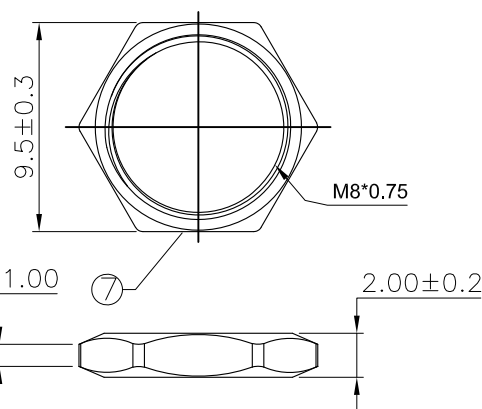

SPECIFICATION

1. Rating : DC 30V 3.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

※ SIGN "X" IS IMPORTANCE DIMENSION

9	WASHER	1	PF	
8	SPLIT WASHER	1	IRON	Ni-Plating
7	NUT	1	BRASS	Ni-Plating
6	HOUSING	1	PBT	
5	AXIS SUPPORT	1	BRASS	Ni-Plating
4	PIN	1	BRASS	Ni-Plating
3	3# CURVE PIECE	1	BRONZE	Sn-Plating
2	2# CURVE PIECE	1	BRASS	Sn-Plating
1	1# CURVE PIECE	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
DC JACK

單位 : mm	繪圖	設計	審核	核准	料號:KDCD-025M-XX
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KDCD-025M-XX-1
日期 : 2021/8/3					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0