
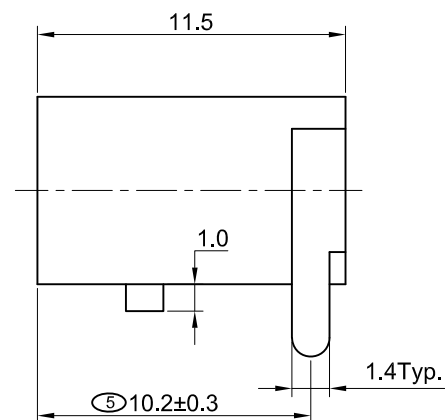
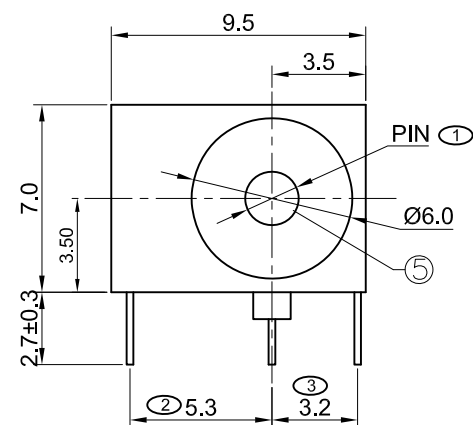




SPECIFICATION

1. Rating : DC 30V 3.0A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.


※ SIGN “(X)” IS IMPORTANCE DIMENSION



XX=PIN	APPD.
Ø2.0	KDCD-044-2.0
Ø2.5	KDCD-044-2.5

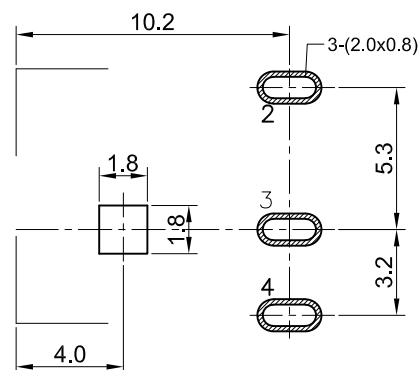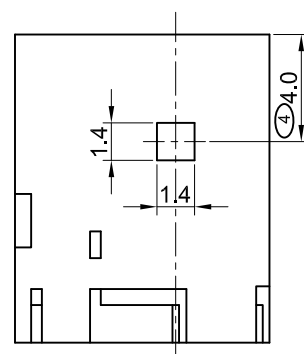

P. C. B LAYOUT
TOP VIEW

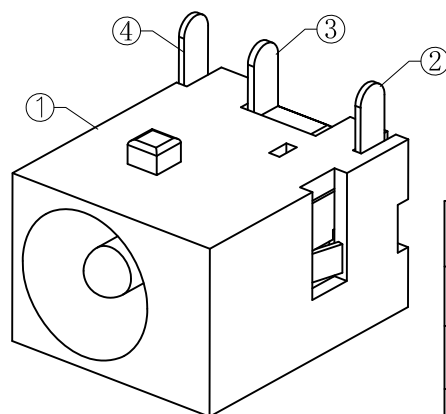

5	PIN	1	BRASS	Ni-Plating
4	CONTACT FOOT	1	BRASS	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING PIECE	1	BRONZE	Ag-Plating
1	HOUSING	1	PA9T UL94V-0	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KEm 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

			單位 : mm 	繪圖 DRAWING	設計 DESIGNED	審核 CHECKED BY	核准 APPROVAL BY	料號:KDCD-044-XX PART NUMBER
			比例 :	JOHNY	JOHNY	LUKE	JAMES	圖號:KDCD-044-XX-1 DRAWING NO
			公差 : X. ±0.38 .X ±0.25 .XX ±0.13					
版本	修改事項	修改日期	日期 : 2022/6/4					