
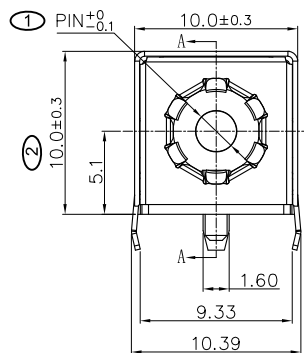

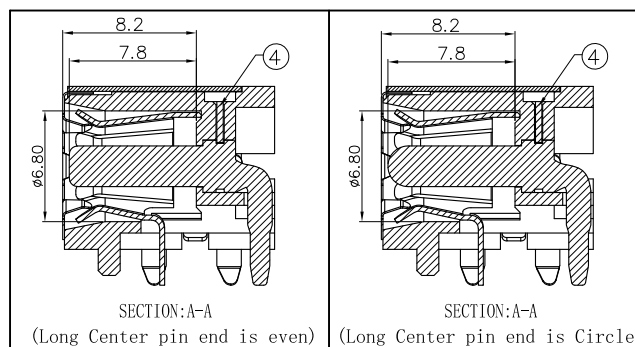


(3D参考视图)


Specification:

- Rating : DC 20V 4A;
- Contact resistance: $\leq 30\text{m}\Omega$;
After test: $\leq 50\text{m}\Omega$
- Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC);
After test: $\geq 50\text{M}\Omega$
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3N~30N;
- life test: 5000cycles MIN.;
- Operation temperature range: -20℃~70℃
- Preservative temperature range: -40℃~85℃

※ SIGN "X" IS IMPORTANCE DIMENSION



□ : TERMINAL NO.

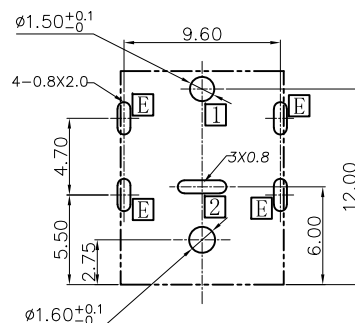

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE: ± 0.05
(TOP VIEW)

⑥	Ground Terminal	E	1	Copper Alloy	Ni plating
⑤	Shield plate		1	Stainless steel	
④	Terminal		1	Copper Alloy	
③	Tip spring	2	1	Copper Alloy	Ag plating
②	Center pin	1	1	Zn Alloy	Ni plating
①	Housing		1	PA10T	Halogen Free, Black
NO.	DESCRIPTION	Q' TY		MATERIAL	REMARK

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
DC POWER JACK

單位 : mm	繪圖	設計	審核	核准	料號:KDCD-046-XX
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ± 0.50 .XX ± 0.30 .XXX ± 0.15	JOHNY	JOHNY	LUKE	JAMES	圖號:KDCD-046-XX-1
日期 : 2017/1/10					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0