
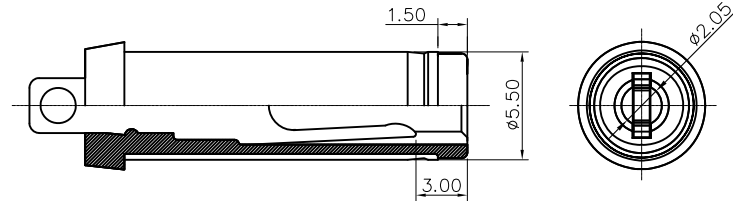


1 2 3 4 5 6 7 8 9

A

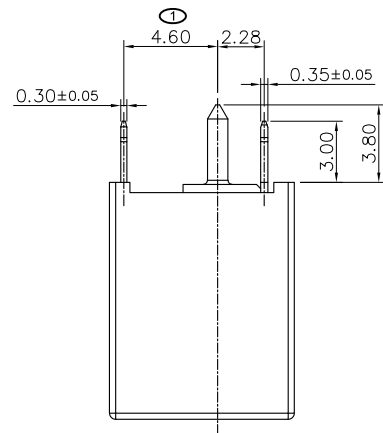




RECOMMENDED PLUG
ø5.5 PLUG

SPECIFICATIONS:


- 1.RATING: DC 20V 5.5A
- 2.INSERTION FORCE: 0.3~3.0KG
WITHDRAWAL FORCE: 0.3~3.0KG
3. DURABILITY CYCLES: 5000 CYCLES.
- 4.INSULATION RESISTANCE BETWEEN ANY
ADJACENT ERMINALS SHALL NOT BE LESS THAN
100M Ω BY 500 VOLTS MEGGER.
- 5.JACK SHALL WITHSTAND 500 VOLTS BETWEEN ANY
ADJACENT TERMINAL FOR ONE MINUTE

B


C

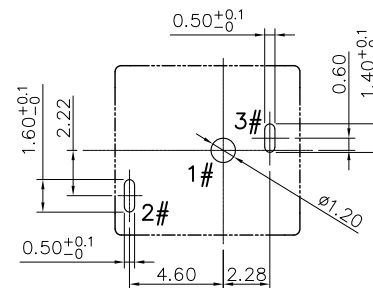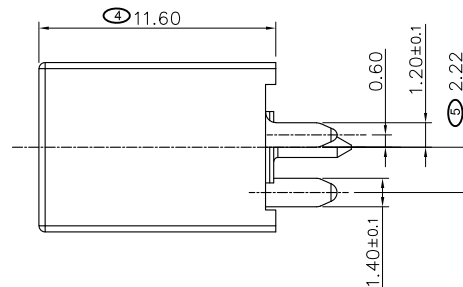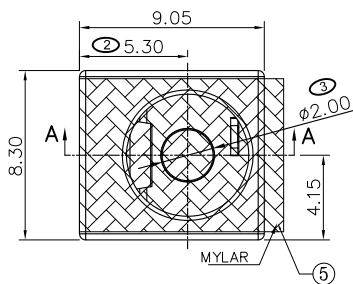


※ SIGN "X" IS IMPORTANCE DIMENSION



D

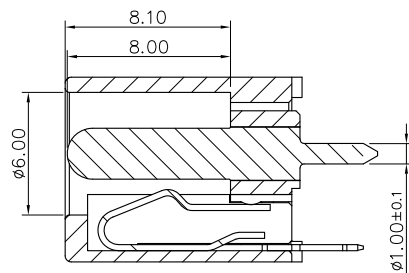

SECTION A-A

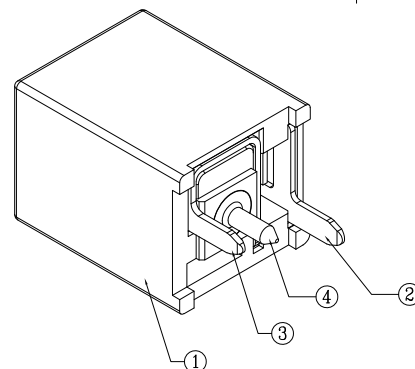

PCB HOLES(TOP VIEW) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.05mm

⑤	MYLAR	1	10*7.5*0.1mm	---
④	CONTACT PIN	1	COPPER ALLOY	Ni plating
③	SHUNT CONTACT	1	COPPER ALLOY	Tin Plating
②	TIP SPRING	1	COPPER ALLOY	Tin Plating
①	HOUSING	1	High-Temp THERMOPLASTIC, Black	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

E

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
DC JACK 180°

F

			單位: mm	繪圖	設計	審核	核准	料號:KDCD-184-2.0
			比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
			公差: .X ±0.38 .XX ±0.30 .XXX ±0.15	JOHNY	JOHNY	LUKE	JAMES	圖號:KDCD-184-2.0-1
版本	修改事項	修改日期	日期: 2019/11/19					版本: REV. 0

1 2 3 4 5 6 7 8 9