


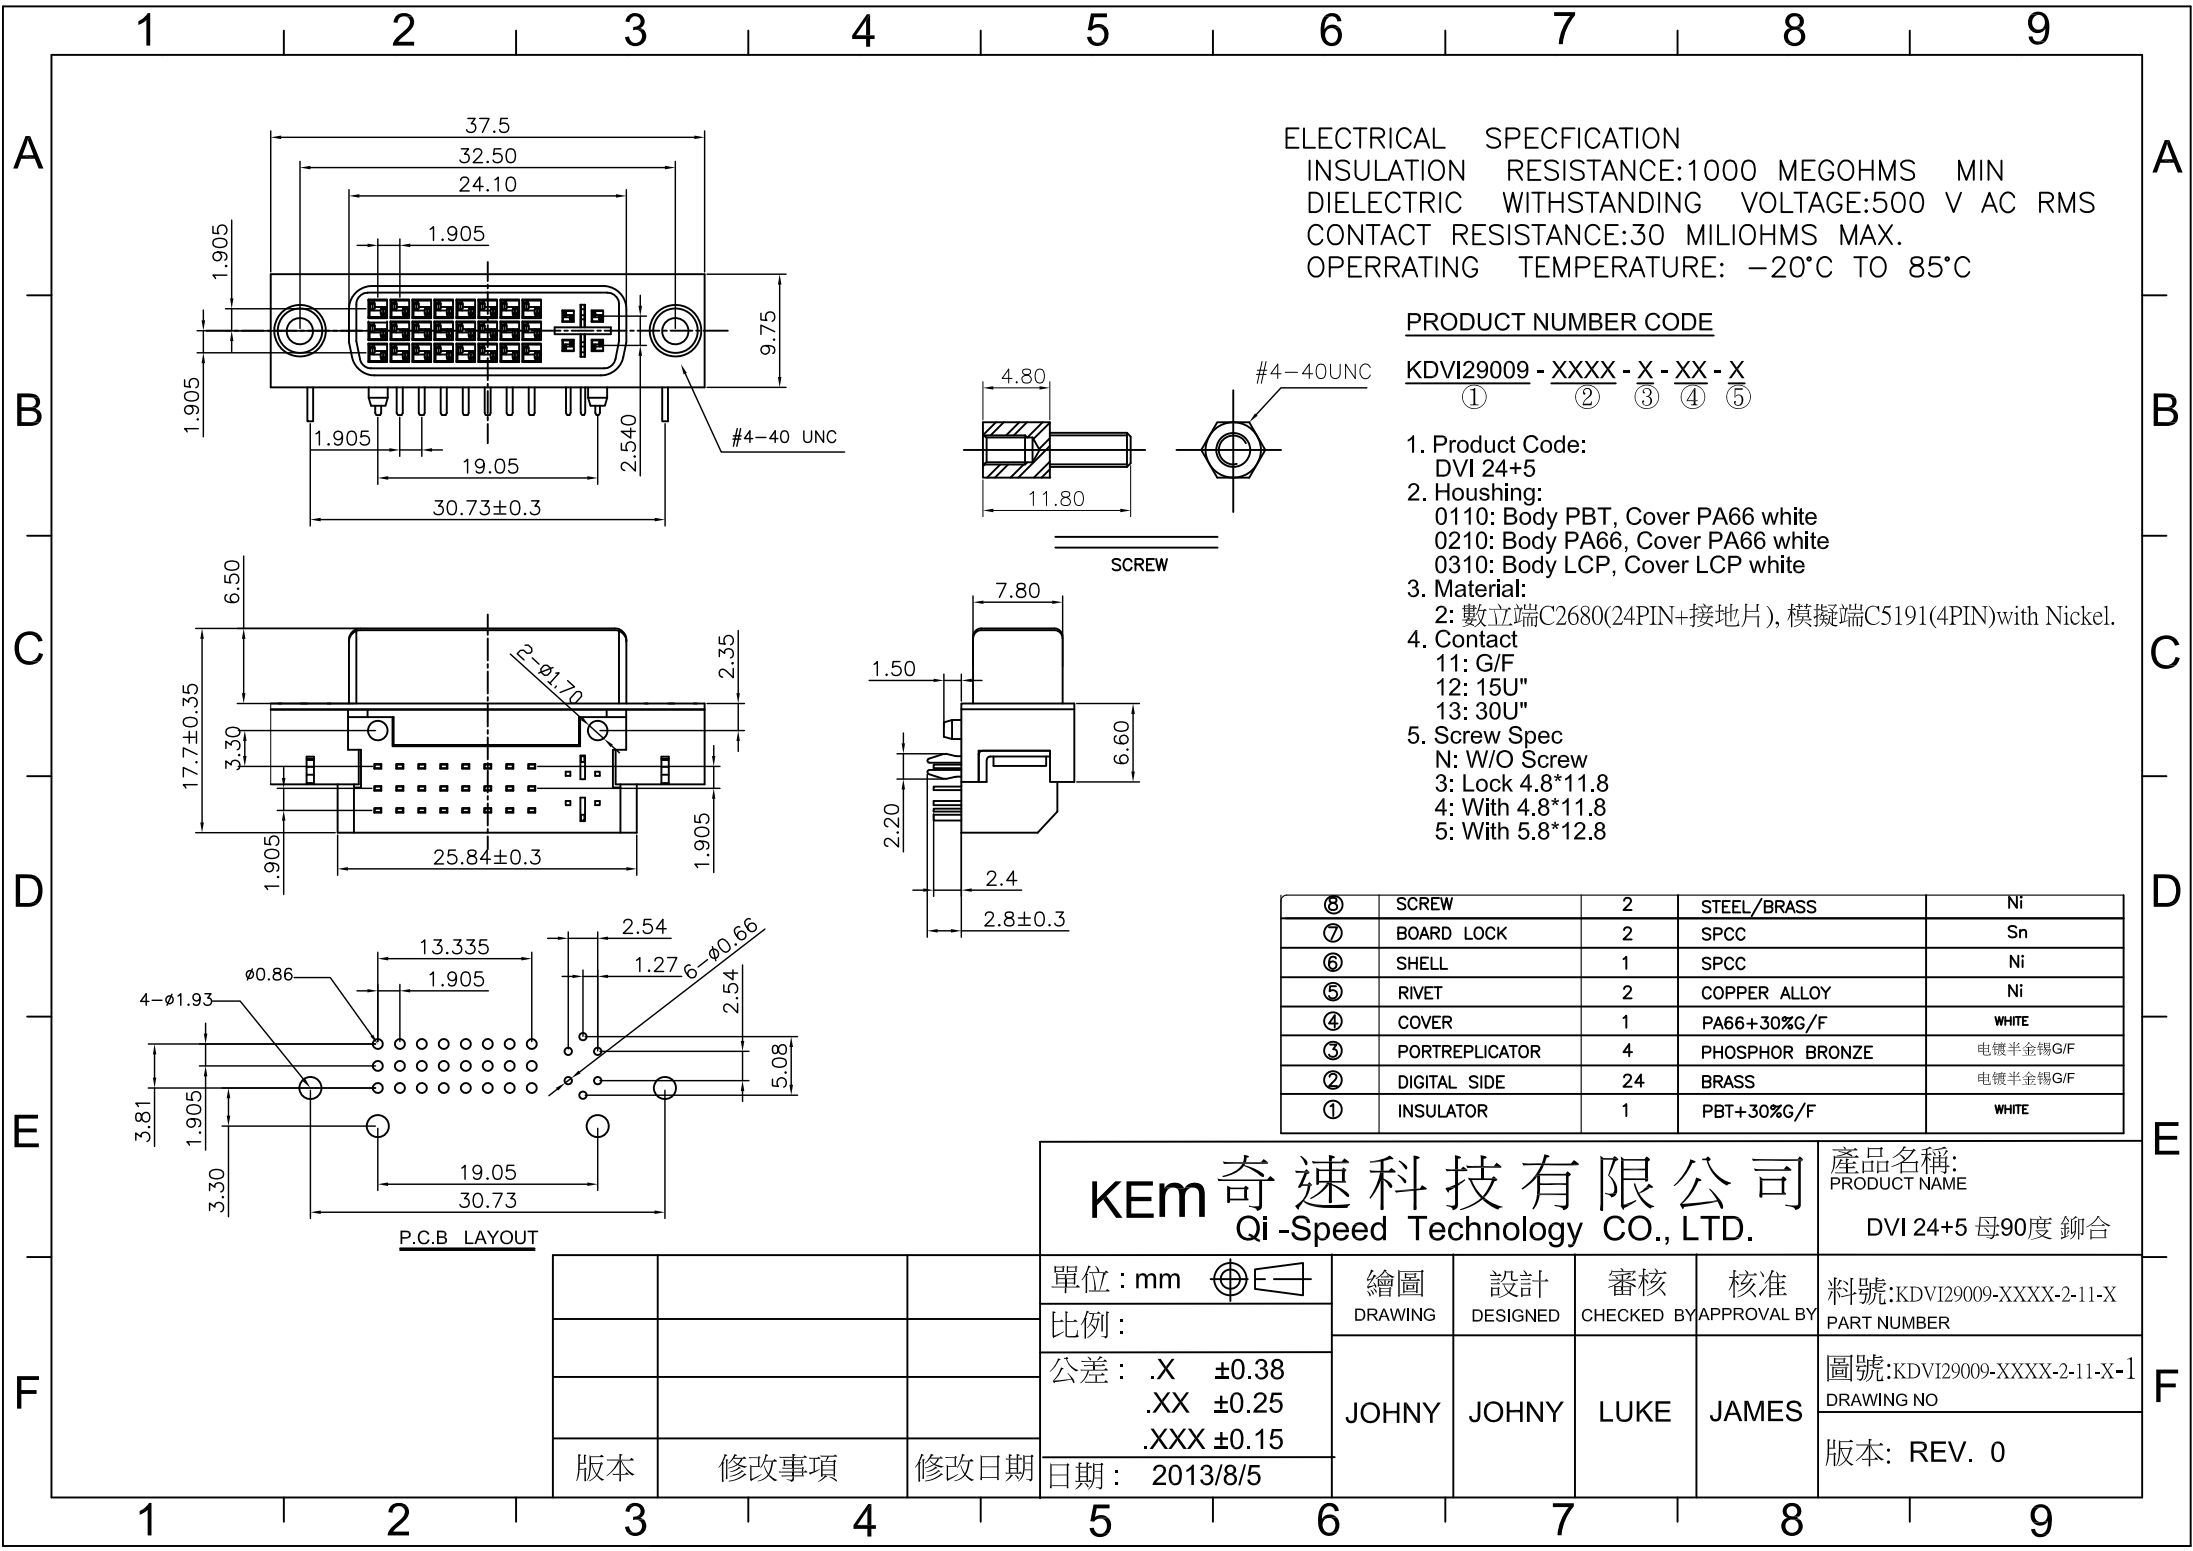

ELECTRICAL SPECIFICATION
INSULATION RESISTANCE:1000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE:500 V AC RMS
CONTACT RESISTANCE:30 MILIOHMS MAX.
OPERRATING TEMPERATURE: -20°C TO 85°C

PRODUCT NUMBER CODE

KDVI29009 - XXXX - X - XX - X
① ② ③ ④ ⑤

- Product Code:
DVI 24+5
- Houshing:
0110: Body PBT, Cover PA66 white
0210: Body PA66, Cover PA66 white
0310: Body LCP, Cover LCP white
- Material:
2: 數立端C2680(24PIN+接地片), 模擬端C5191(4PIN)with Nickel.
- Contact
11: G/F
12: 15U"
13: 30U"
- Screw Spec
N: W/O Screw
3: Lock 4.8*11.8
4: With 4.8*11.8
5: With 5.8*12.8

⑧	SCREW	2	STEEL/BRASS	Ni
⑦	BOARD LOCK	2	SPCC	Sn
⑥	SHELL	1	SPCC	Ni
⑤	RIVET	2	COPPER ALLOY	Ni
④	COVER	1	PA66+30%G/F	WHITE
③	PORTREPLICATOR	4	PHOSPHOR BRONZE	电镀半金錫G/F
②	DIGITAL SIDE	24	BRASS	电镀半金錫G/F
①	INSULATOR	1	PBT+30%G/F	WHITE

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
DVI 24+5 母90度 鉚合

單位: mm	繪圖	設計	審核	核准	料號:KDVI29009-XXXX-2-11-X
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.15	JOHNY	JOHNY	LUKE	JAMES	圖號:KDVI29009-XXXX-2-11-X-1 DRAWING NO
日期: 2013/8/5					版本: REV. 0
版本	修改事項	修改日期			