
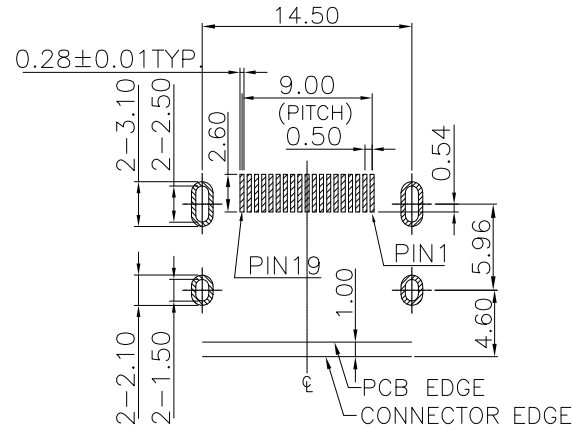


1 2 3 4 5 6 7 8 9

A

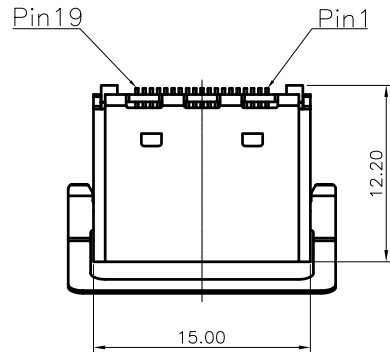

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS
 - CURRENT RATING: 0.5 AMP
 - VOLTAGE RATING: 40 V
 - CONTACT RESISTANCE: 30MILLIOHMS MAX
 - INSULATION RESISTANCE: 100M MIN. @ 500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 4.5KGF MAX.
 - WITHDRAWING FORCE : 1KGF ~ 4KGF.
- LIFE TEST: 10000 CYCLES
- OPERATING TEMPERATURE: -25°C TO +85°C
- PART NO. DESCRIPTION:



KHD-1006 X -C12

外壳电镀

1 : Ni

2 : G/F

C

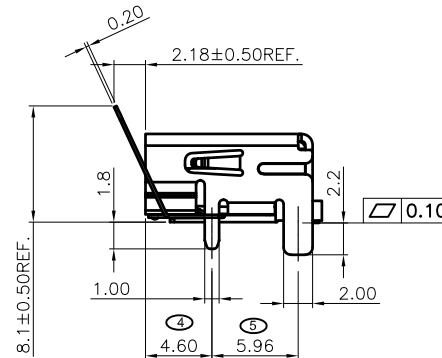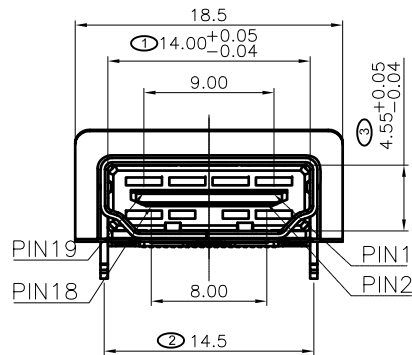

D

※ SIGN "X" IS IMPORTANCE DIMENSION

D	SPRING	1	SUS 304; T=0.2MM
C	SHELL	1	C2680R-H Ni 50u" T=0.5mm PLATING ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

E


KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

HDMI SMT 刺破式銅壳鍍光銀 四直脚兩彈片 側面帶彈 模印 无小耳朵 D款彈片 胶无柱 端子半金1u"

單位 : mm	繪圖	設計	審核	核准	料號: KHD-1006X-C12
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KHD-1006X-C12-1
日期 : 2021/5/8					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0

F

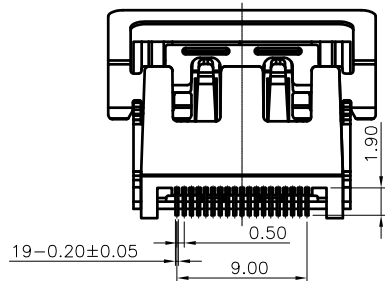

1 2 3 4 5 6 7 8 9