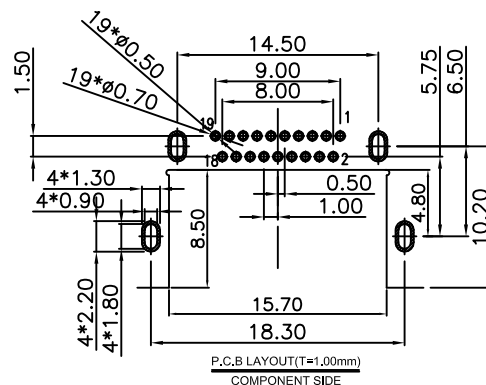



SPECIFICATIONS:

1.MATERIAL SPECIFICATION:

1-1.HOUSING:LCP,UL94 V-0,BLACK

1-2.CONTACTS: BRASS(C2680)

1-3.SHELL: S50C

2.PLATING SPECIFICATION:

2-1.CONTACTS:GOLD FLASH PLATED ON CONTACT AREA,100u"MIN MATTE-TIN
ON SOLIDER TAIL AREA,BOTH OVER 50u"MIN NI UNDERPLATED OVERALL.

2-2.SHELL: NI 50u"MIN

3. ELECTRICAL CHARACTERISTICS

3-1. CURRENT RATING: 0.5 AMP

3-2. VOLTAGE RATING: 40 V

3-3. CONTACT RESISTANCE: 30MILLIOHMS MAX

3-4. INSULATION RESISTANCE:100M MIN.@500V DC

3-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

4. MECHANICAL CHARACTERISTICS:

4-1. INSERTION FORCE : 4.5KGF MAX.

4-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.

5. LIFE TEST: 10000 CYCLES

6. OPERATING TEMPERATURE: -25°C TO +85°C

※ SIGN "⊗" IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME


HDML 正向沉板S50C 外壳鍍銀兩脚兩直脚，中心高度0.65
外壳总长12.55 端子间距1.5 端子半金鍍1u" 黑色胶芯

料號:KHD17-417140-002-7-R
PART NUMBER

圖號:KHD17-417140-002-7-R-1
DRAWING NO

版本: REV. 0

單位 : mm



比例 :

公差 : .X ±0.38
.XX ±0.25
.XXX ±0.15

日期 : 2019/7/28

繪圖
DRAWING

設計
DESIGNED

審核
CHECKED BY

核准
APPROVAL BY

JOHNY

JOHNY

LUKE

JAMES

版本

修改事項

修改日期