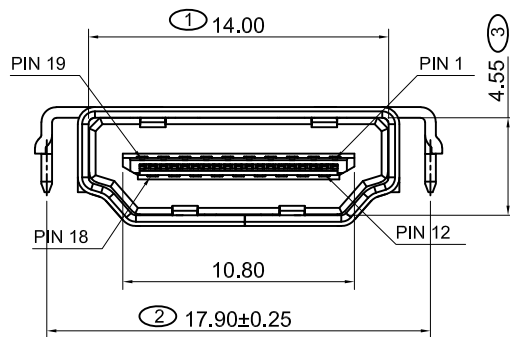
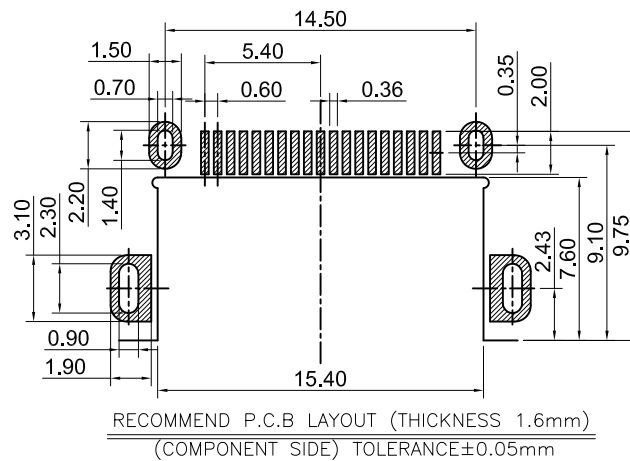
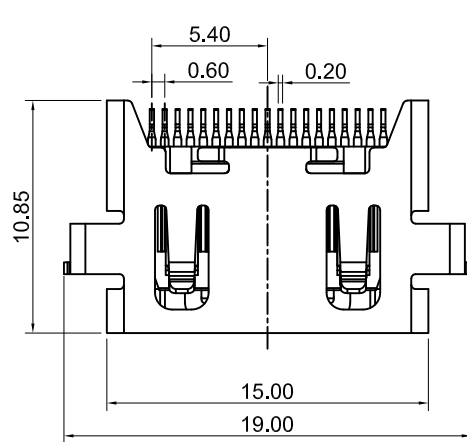


SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE:100M MIN. @500V DC
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 4.5KGF MAX.
- 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.

3. LIFE TEST: 10000 CYCLES

4. OPERATING TEMPERATURE: -25°C TO +85°C

※ SIGN “(X)” IS IMPORTANCE DIMENSION

PART NO. :

KHD17-48 X 1107B

CONTACTS PLATED:

- 1 半金亮锡G/F
- 2 接触端3u"金, SMT端 亮锡
- 3 接触端5u"金, SMT端 亮锡
- 4 接触端15u"金, SMT端 亮锡
- 5 接触端30u"金, SMT端 亮锡
- 6 接触端1u"金, SMT端 1u"金
- 7 半金雾锡G/F
- 8 接触端3u"金, SMT端 雾锡
- 9 接触端15u"金, SMT端 雾锡
- A 全金30"
- B 接触端10u"金, SMT端 亮锡
- C 接触端30u"金, SMT端 雾锡
- D 接触端5u"金, SMT端 雾锡

C	SHELL	1	SPCC Ni T=0.5mm PLATING ALL OVER
B	TERMINAL	19	C2680R-H G/F
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
HDMI AF 正向沉板 CH-0.6 端子半金雾锡G/F

單位 : mm	繪圖	設計	審核	核准	料號:KHD17-48X1107B
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KHD17-48X1107B-1
日期 : 2022/9/22					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0