

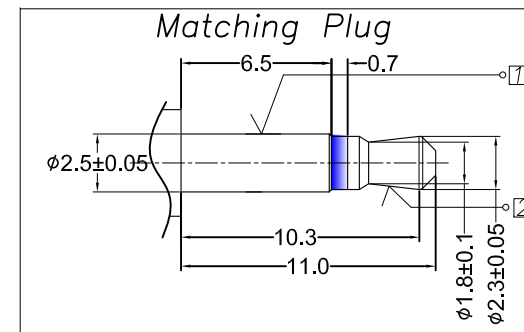
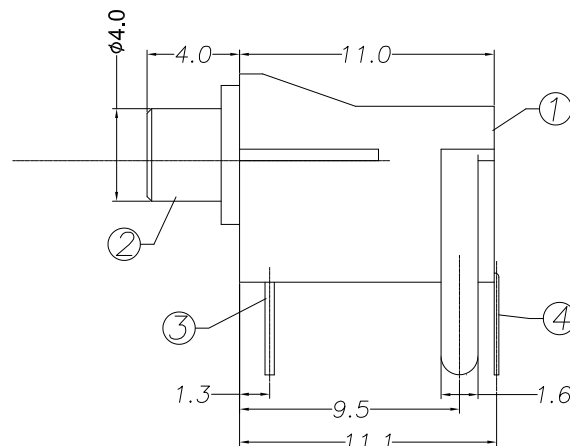
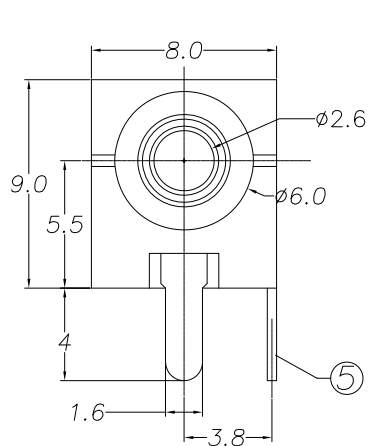


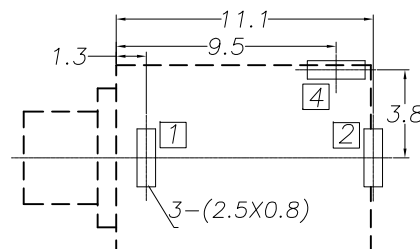

SPECIFICATION
 1.Rating : DC 30V 0.5A;
 2.Contact resistance: $\leq 30\text{m}\Omega$;
 3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
 4.Withstand voltage: 500VAC ;
 5.Insertion and extraction force: 3-25N;
 6.life test: 5,000 cycles .

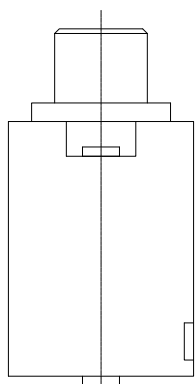

P. C. B. Layout

⑤	Shunt terminal	④	1	Brass	Sn-Plating
④	Tip spring	②	1	Phosphor bronze	Sn-Plating
③	Earth spring	①	1	Brass	Sn-Plating
②	Bushing		1	Copper alloy	Ni/Au/Cu-Sn-Plating
①	Housing		1	PBT 94V-0	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING	

Model NO.	KPJD-202-2.5
Schematic	

□: TERMINAL NO.

版本	修改事項	修改日期

KEM 奇速科技有限公司 Qi-Speed Technology CO., LTD.				產品名稱: PRODUCT NAME Ø2.5 PHONE JACK	
單位: mm	繪圖	設計	審核	核准	料號: KPJD-202-2.5
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: X. ±0.30 X.X ±0.25 X.XX ±0.15	JOHNY	JOHNY	LUKE	JAMES	圖號: KPJD-202-2.5-1
日期: 2020/11/24					DRAWING NO
					版本: REV. 0