
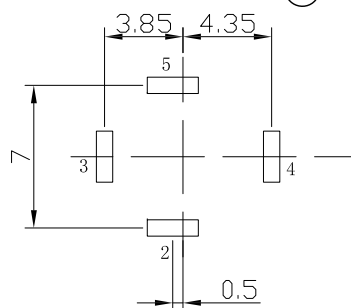

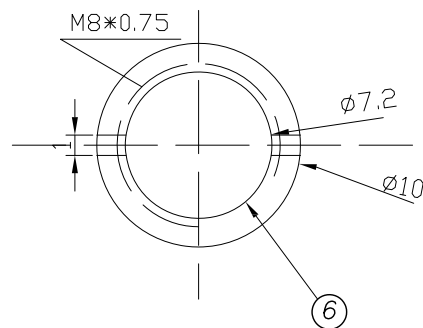
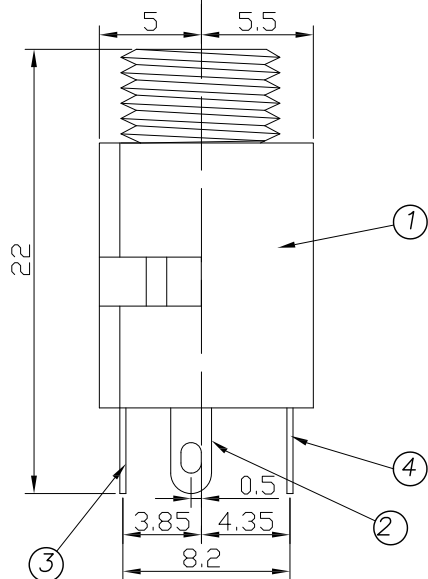
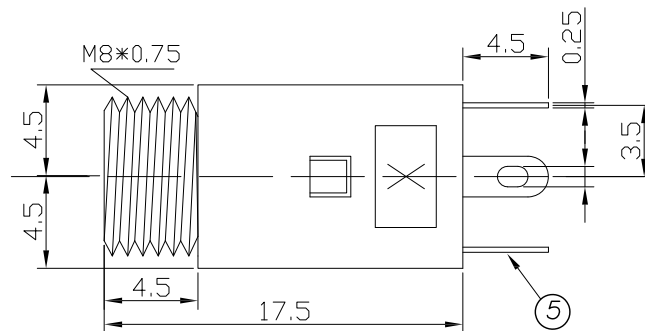


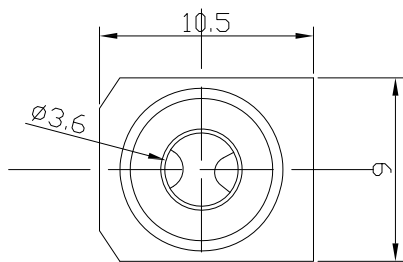

P. C. B LAYOUT

主要技术性能:

1. Rating : DC 30V 0.2A;
2. Contact resistance: $\leq 30m\Omega$;
After test: $\leq 50m\Omega$
3. Insulation resistance: $\geq 100M\Omega$ (500VDC);
After test: $\geq 50M\Omega$
4. Withstand voltage: 250VAC ;
5. Insertion and extraction force: 3N~30N;
6. life test: 5000cycles;

Model NO.	KPJD-30410B-3.5	KPJD-30410D-3.5	KPJD-30410C-3.5
Schematic			

6	螺母	1	黄铜H59	镀锡
5	接地PIN2	1	磷铜	镀锡
4	右声道弹片	1	磷铜	镀锡
3	右声道弹片	1	磷铜	镀锡
2	接地PIN	1	磷铜	镀锡
1	基座	1	PBT	黑色
序号	名称	用量	材料	镀层/颜色

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
PHONE JACK Ø3.5 直立式

單位: mm



比例:

公差: X. ± 0.35
.X ± 0.30
.XX ± 0.25

日期: 2021/6/2

繪圖

DRAWING

設計

DESIGNED

審核

CHECKED BY

核准

APPROVAL BY

JOHNY

JOHNY

LUKE

JAMES

料號: KPJD-30410X-3.5
PART NUMBER

圖號: KPJD-30410X-3.5-1
DRAWING NO

版本: REV. 0

版本

修改事項

修改日期