

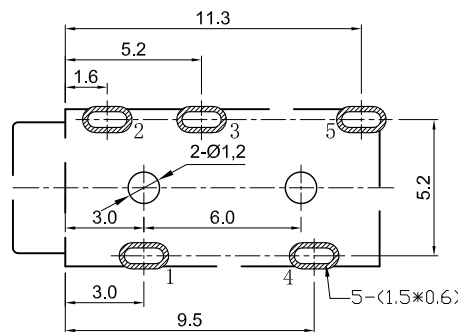
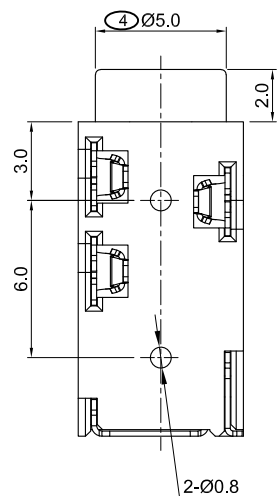
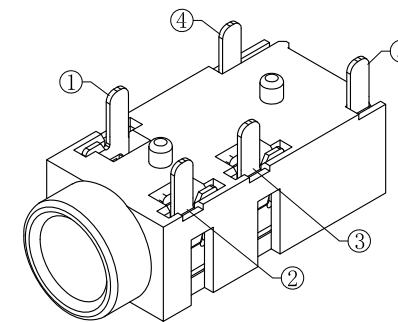
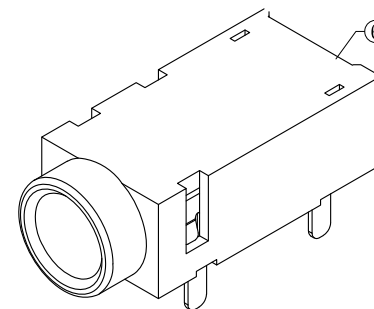
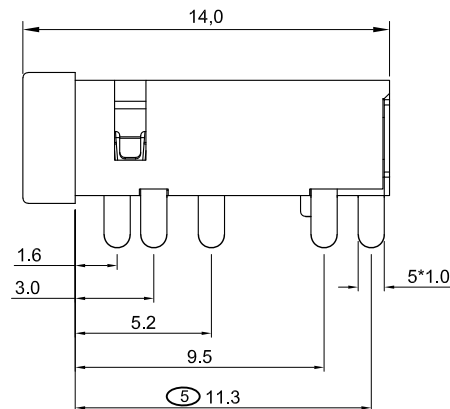


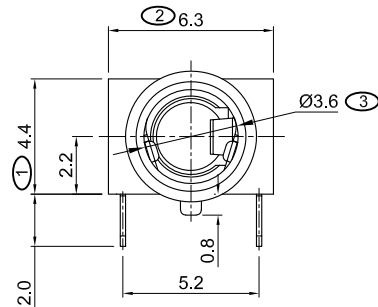

P. C. B LAYOUT
TOP VIEW

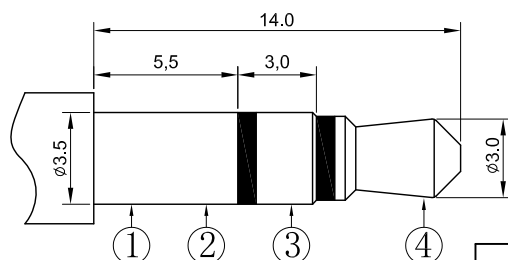

Ø3.50mm 3 POLE PLUG

SCHEMATIC		
KPJD-3127D-5B4	KPJD-3127D-4B4	KPJD-3127D-4D4

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

※ SIGN "⊗" IS IMPORTANCE DIMENSION

6	HOUSING	1	PPA	
5	5# CONTACT FOOT	1	BRONZE	Au-Plating
4	4# CONTACT FOOT	1	BRONZE	Au-Plating
3	3# CONTACT FOOT	1	BRONZE	Au-Plating
2	2# CONTACT FOOT	1	BRONZE	Au-Plating
1	1# CONTACT FOOT	1	BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
PHONE JACK Ø3.5

單位 : mm	繪圖	設計	審核	核准	料號: KPJD-3127D-XX4-3.5
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KPJD-3127D-XX4-3.5-1 DRAWING NO
日期 : 2022/3/11					版本: REV. 0