

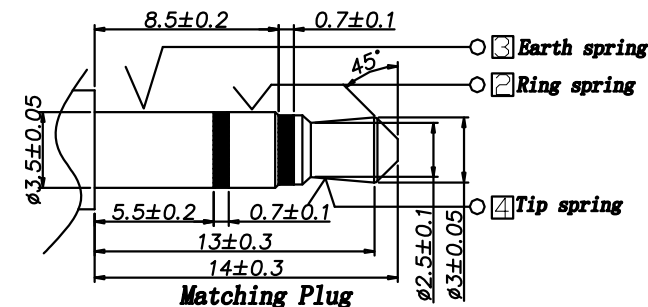
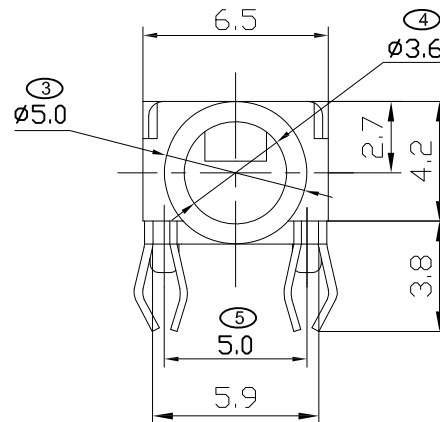


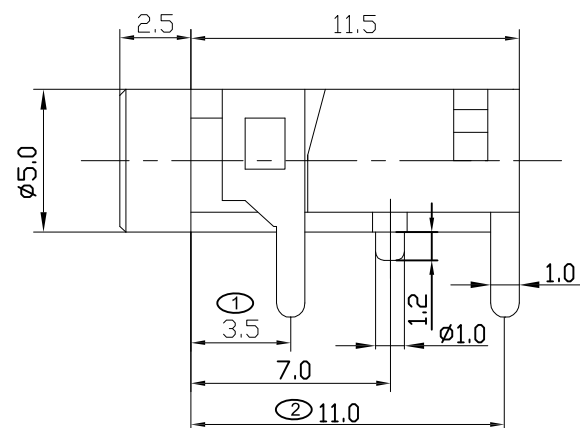


SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$;
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

※ SIGN “(X)” IS IMPORTANCE DIMENSION

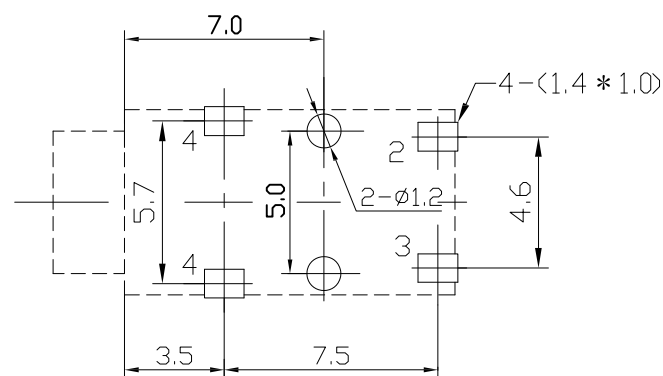

SCHEMATIC



④	4#脚Earth spring	1	黄铜T=0.3	镀银Ag-Plating
③	3#脚Ring spring	1	磷铜T=0.3	镀银Ag-Plating
②	2#脚Tip spring	1	磷铜T=0.3	镀银Ag-Plating
①	基座	1	PBT UL94V-0	X:_=BLACK/R=RED/G=GREEN
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-sided view)

KEm 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

			單位 : mm 	繪圖 DRAWING	設計 DESIGNED	審核 CHECKED BY	核准 APPROVAL BY	料號:KPJD-321-3.5-X PART NUMBER
			比例 :	JOHNNY	JOHNNY	LUKE	JAMES	圖號:KPJD-321-3.5-X-1 DRAWING NO
			公差 : .X ±0.50 .XX ±0.30 .XXX ±0.15					版本: REV. 0
版本	修改事項	修改日期	日期 : 2021/5/8					