

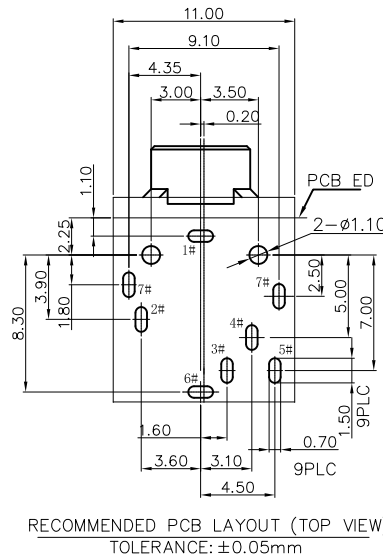



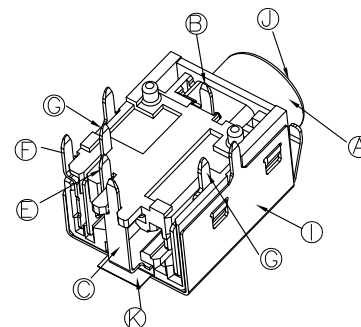
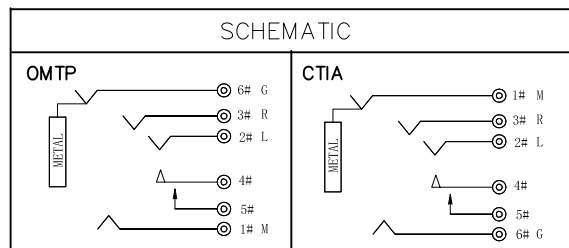
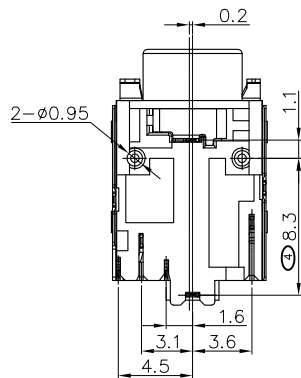





Specification:

1. Rating : DC 12V 1A.
2. Contact resistance: $\leq 50m\Omega$ (INITIAL)
3. Insulation resistance: $\geq 100M\Omega$ (500VDC). After life test: $\geq 50M\Omega$.
4. Withstand voltage: 500VAC.
5. Insertion and extraction force: 3N~30N.
6. life test: 5000cycles min.
7. Operation temperature range: -20℃~70℃.
8. Preservative temperature range: -40℃~85℃.

※ SIGN "X" IS IMPORTANCE DIMENSION



(K)	Mylar	1	————	————
(J)	Metal	1	H59	Ni 60u"
(I)	Shielding	1	SUS301-1/2H t=0.2	Ni 60u"
(H)	Separator	1	PA9T	BLACK
(G)	Transfer	1	C5210R-EH t=0.20	GOLD FLASH ON CONTACT AREA AND SOLD TAIL, NI 50u" MIN OVER ALL
(F)	Make terminal	1	C5210R-EH t=0.20	
(E)	Ring B	1	C5210R-EH t=0.20	GOLD FLASH ON CONTACT AREA, 80u"MATTE TIN ON SOLD TAIL, NI 50u" MIN OVER ALL
(D)	Tip spring	1	C5210R-EH t=0.25	
(C)	Earth-A	1	C5210R-EH t=0.20	
(B)	Ring A	1	C5210R-EH t=0.20	
(A)	Housing	1	PA10T + 30%GF	BLACK
NO. DESCRIPTION		QTY	MATERIAL	REMARK

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
Ø3.5 PHONE JACK

單位：mm		繪圖	設計	審核	核准	料號:KPJD-32690-3.5
比例：		DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差：X. ±0.38		JOHNY	JOHNY	LUKE	JAMES	圖號:KPJD-32690-3.5-1
.X ±0.25						DRAWING NO
.XX ±0.15						
日期：2016/12/20						版本: REV. 0

版本	修改事項	修改日期