




RECOMMENDED PLUG
ø3.5 4-POLE STANDARD PLUG

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 50\text{m}\Omega$;
After test: $\leq 100\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC);
After test: $\geq 50\text{M}\Omega$
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3N~30N;
6. life test: 5000cycles ;
7. Operation temperature range: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
8. Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

※ SIGN “⊗” IS IMPORTANCE DIMENSION

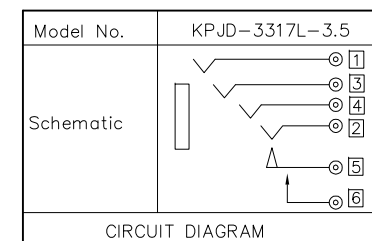

□ : TERMINAL NO.

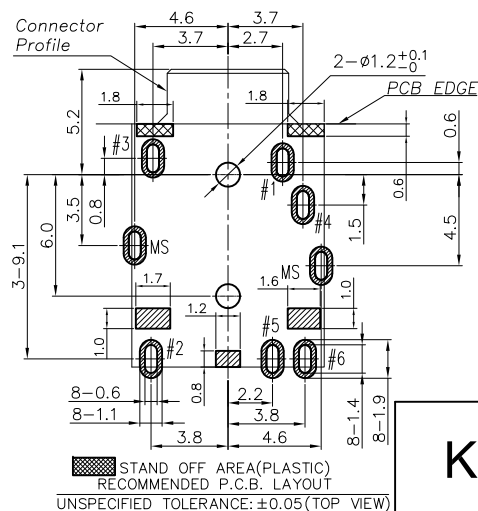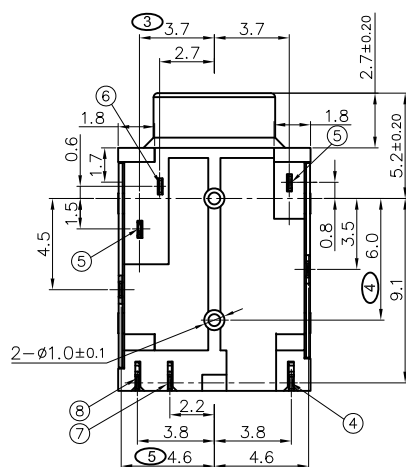

⑨	Mylar 1	1	_____	_____
⑧	Make spring	6	1 Copper Alloy	20u”Ag ,50u
⑦	Transfer spring	5	1 Copper Alloy	Ni Plating
⑥	Earth spring	1	1 Copper Alloy	See *Ordering info
⑤	Ring spring	3	4 2 Copper Alloy	
④	Tip spring	2	1 Copper Alloy	
③	Shell	1	1 Copper Alloy	Ni Plating
②	Separate	1	High-Temp Thermoplastic (Halogen Free)	BLACK
①	Housing	1	High-Temp Thermoplastic (Halogen Free)	BLACK
NO.	DESCRIPTION	Q' TY	MATERIAL	REMARK

KEm 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

3.5 PHONE JACK

單位: mm 

比例：

公差：	.X	±0.50
	.XX	±0.30
	.XXX	±0.15

日期：2017/3/27

繪圖
DRAWING

設計
DESIGNER

审核
CHECKED

核准
YI APPROVAL BY

料號:KPJD-3317L-3.5
PART NUMBER

圖號:KPJD-3317L-3.5-1
DRAWING NO

版本: REV. 0

版本	修改事項	修改日期
----	------	------