

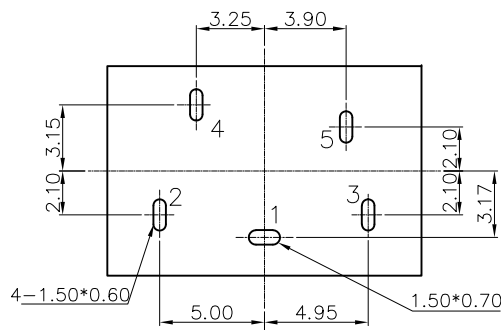
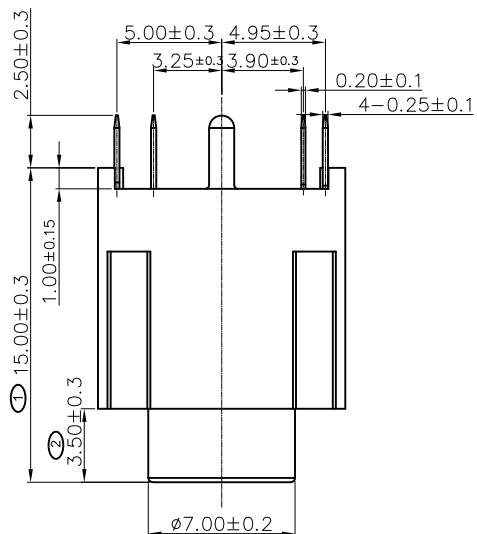

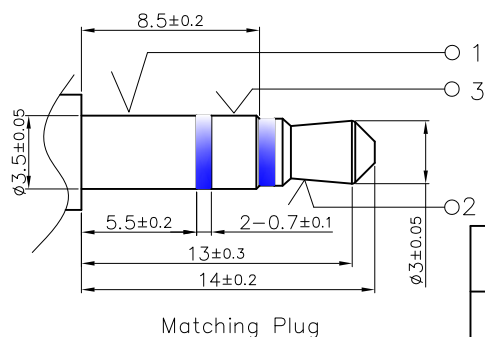


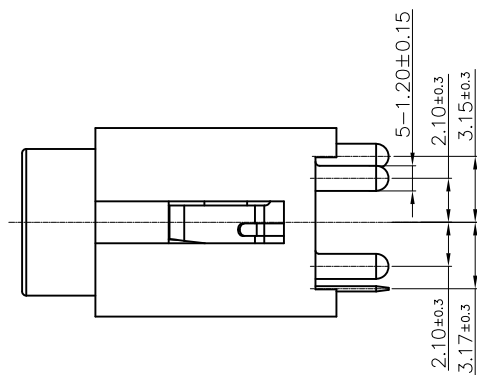


PCB HOLES(TOP VIEW) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.05mm

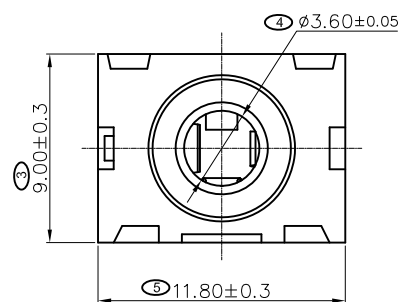

Specification:

1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 30m\Omega$;
After test: $\leq 50m\Omega$
 3. Insulation resistance: $\geq 100M\Omega$ (500VDC);
After test: $\geq 50M\Omega$
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3N~30N;
 6. life test: 5000cycles min;
 7. Operation temperature range: $-20^{\circ}C \sim 70^{\circ}C$;
 8. Preservation temperature range: $-40^{\circ}C \sim 85^{\circ}C$;
- ※ SIGN "ⓧ" IS IMPORTANCE DIMENSION

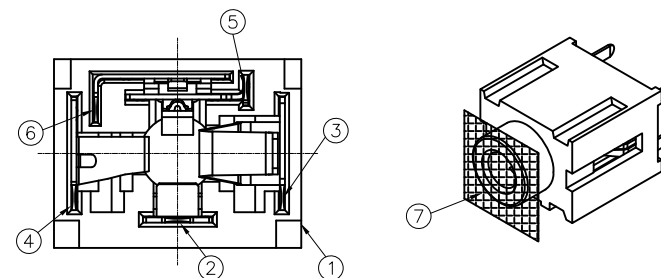

⑦	Mylar	1		
⑥	Shunt terminal	⑤	1	Phosphor Bronze t=0.2mm
⑤	Shunt terminal	④	1	Phosphor Bronze t=0.25mm
④	Ring spring	③	1	Phosphor Bronze t=0.25mm
③	Tip spring	②	1	Phosphor Bronze t=0.25mm
②	Earth spring	①	1	Phosphor Bronze t=0.25mm
①	Housing			PBT
NO	DESCRIPTION	Q' TY	MATERIAL	REMARK

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
DC POWER JACK

單位: mm	繪圖	設計	審核	核准	料號: KPJD-33240-3.5
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.30 .XXX ±0.15	JOHNY	JOHNY	LUKE	JAMES	圖號: KPJD-33240-3.5-1
日期: 2017/12/12					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0