
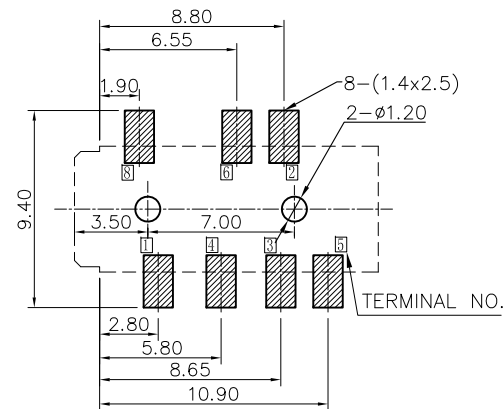
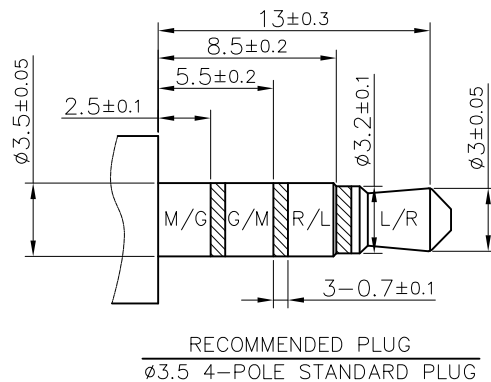




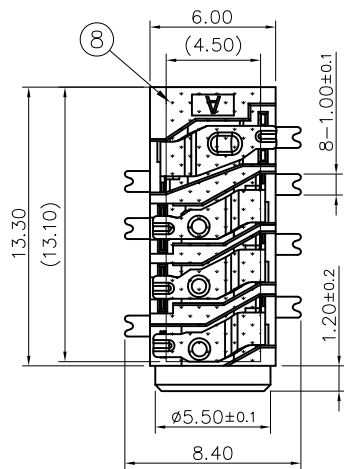


PCB HOLES(TOP VIEW) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.05mm



Specification:

1. Rating : DC 30V 0.5A.
2. Contact resistance: ≤50mΩ.
After life test: ≤100mΩ.
3. Insulation resistance: ≥100MΩ (500VDC).
After life test: ≥50MΩ.
4. Withstand voltage: 500VAC.
5. Insertion and extraction force:
3N~30N(Initial).
3N~30N(After Life Test).
6. life test: 5000cycles min.
7. Operation temperature range: -20℃~70℃.
8. Preservative temperature range: -40℃~85℃.

※ SIGN "X" IS IMPORTANCE DIMENSION

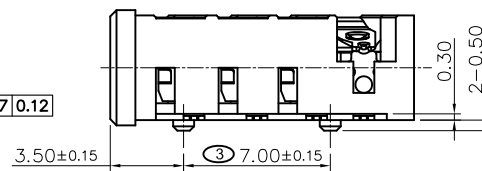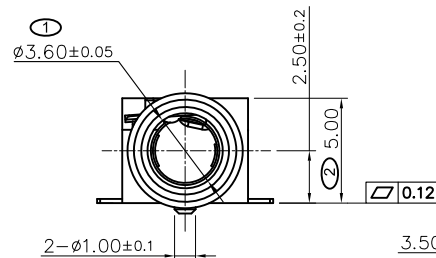

⑧	MYLAR		1	Polyimide	---
⑦	SHUNT TERMINAL	⑧	1	C5191R-H, T=0.20	Silver plating
⑥	SHUNT TERMINAL	⑥	2	C5191R-H, T=0.20	
⑤	SHUNT TERMINAL	⑤	1	C5191R-H, T=0.20	
④	RING SPRING	③④	2	SUS301R-1/2H, T=0.20	
③	TIP SPRING	②	1	SUS301R-1/2H, T=0.20	
②	Earth spring	①	1	SUS301R-1/2H, T=0.20	
①	Housing		1	PA10T	X: BLACK/RED/GREEN
NO.	DESCRIPTION	QTY			REMARK

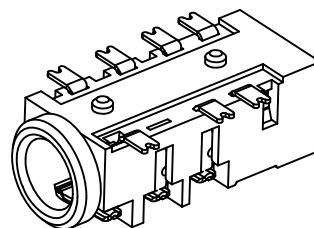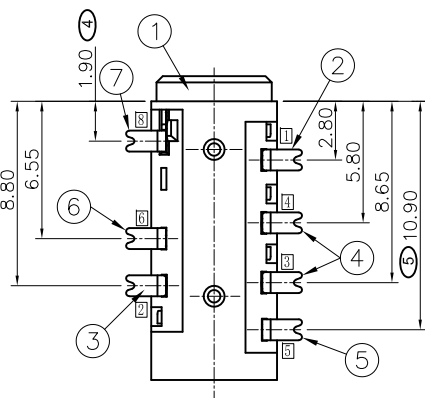

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
ø3.5 PHONE JACK

單位: mm	繪圖	設計	審核	核准	料號: KPJS-30930-3.5
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.30 .XXX ±0.15	JOHNY	JOHNY	LUKE	JAMES	圖號: KPJS-30930-3.5-1
版本	修改事項	修改日期	日期: 2017/3/9		DRAWING NO
					版本: REV. 0