

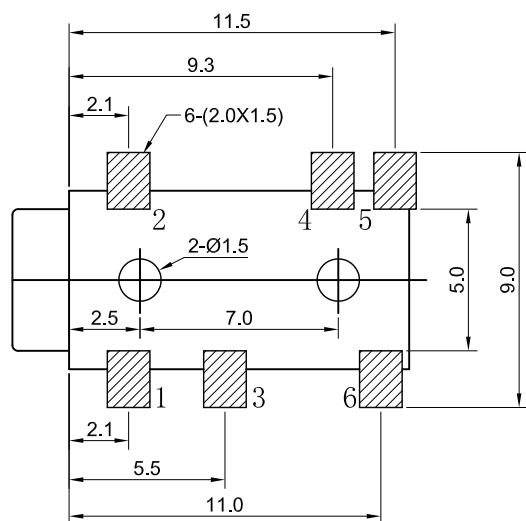


Ø3.50mm 4 POLE PLUG



P. C. B LAYOUT
TOP VIEW

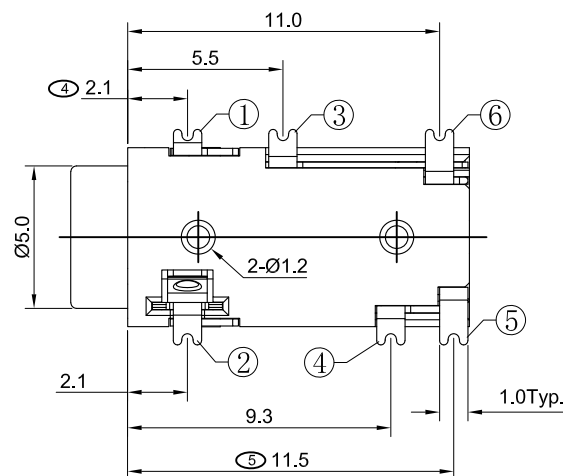


SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

* SIGN "X" IS IMPORTANCE DIMENSION

7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	BRONZE	Au-Plating
5	5# CONTACT FOOT	1	BRONZE	Au-Plating
4	4# CONTACT FOOT	1	BRONZE	Au-Plating
3	3# CONTACT FOOT	1	BRONZE	Au-Plating
2	2# CONTACT FOOT	1	BRONZE	Au-Plating
1	1# CONTACT FOOT	1	BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

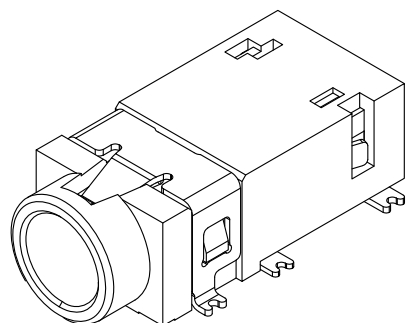

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
Ø3.5 PHONE JACK

單位 : mm	繪圖	設計	審核	核准	料號: KPJS-31420-XX-3.5
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : X. ±0.38 .X ±0.25 .XX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KPJS-31420-XX-3.5-1
日期 : 2022/12/5					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0