
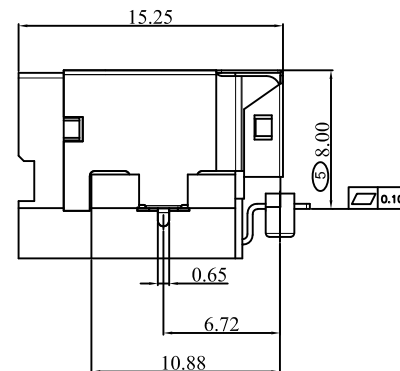




1 2 3 4 5 6 7 8 9

A

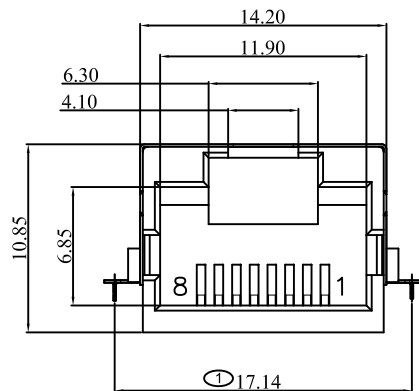

B

C

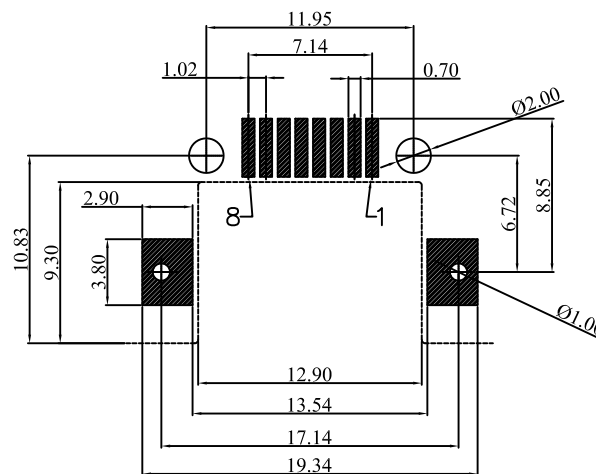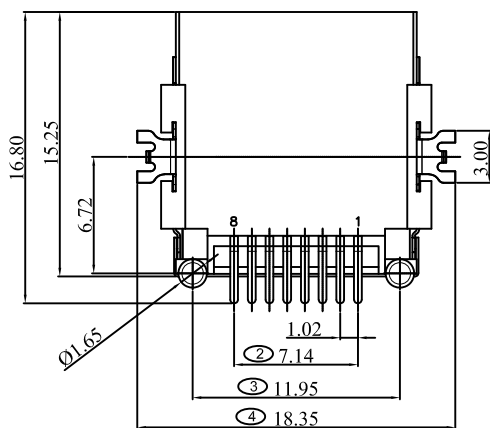

D

E

F

NOTES

MECHANICAL:

1. HOUSING MATERIAL: LCP BLACK UL94V-0
2. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.3mm.
3. PLATING: GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100U MIN., NICKEL 30U MIN. OVER ALL
4. SHIELD: BRASS T=0.15mm PLATED NICKEL 30u" Min .
5. OPERATING LIFE: 750 CYCLES MIN.
6. MATING/UNMATING FORCE: 30N/3.06KGf MAX
7. RETENTION STRENGTH: 50N MIN. FOR 60S±5S

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.

ENVIRONMENTAL:

1. STORAGE: -40℃ TO +85℃ RELATIVE HUMIDITY<80%.
2. OPERATION: -40℃ TO +85℃.

※ SIGN "X" IS IMPORTANCE DIMENSION

RECOMMENDED PCB LAYOUT
PTOLERANCE=±0.05

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

RJ45 JACK 沉板上8.0mm屏蔽半包

單位: mm



比例:

公差: .X ±0.38
.XX ±0.25
.XXX ±0.13

日期: 2023/4/11

繪圖
DRAWING

設計
DESIGNED

審核
CHECKED BY

核准
APPROVAL BY

JOHNY

JOHNY

LUKE

JAMES

料號: KRJ-11800-88GF-C
PART NUMBER

圖號: KRJ-11800-88GF-C-1
DRAWING NO

版本: REV. 0

版本

修改事項

修改日期

1 2 3 4 5 6 7 8 9