
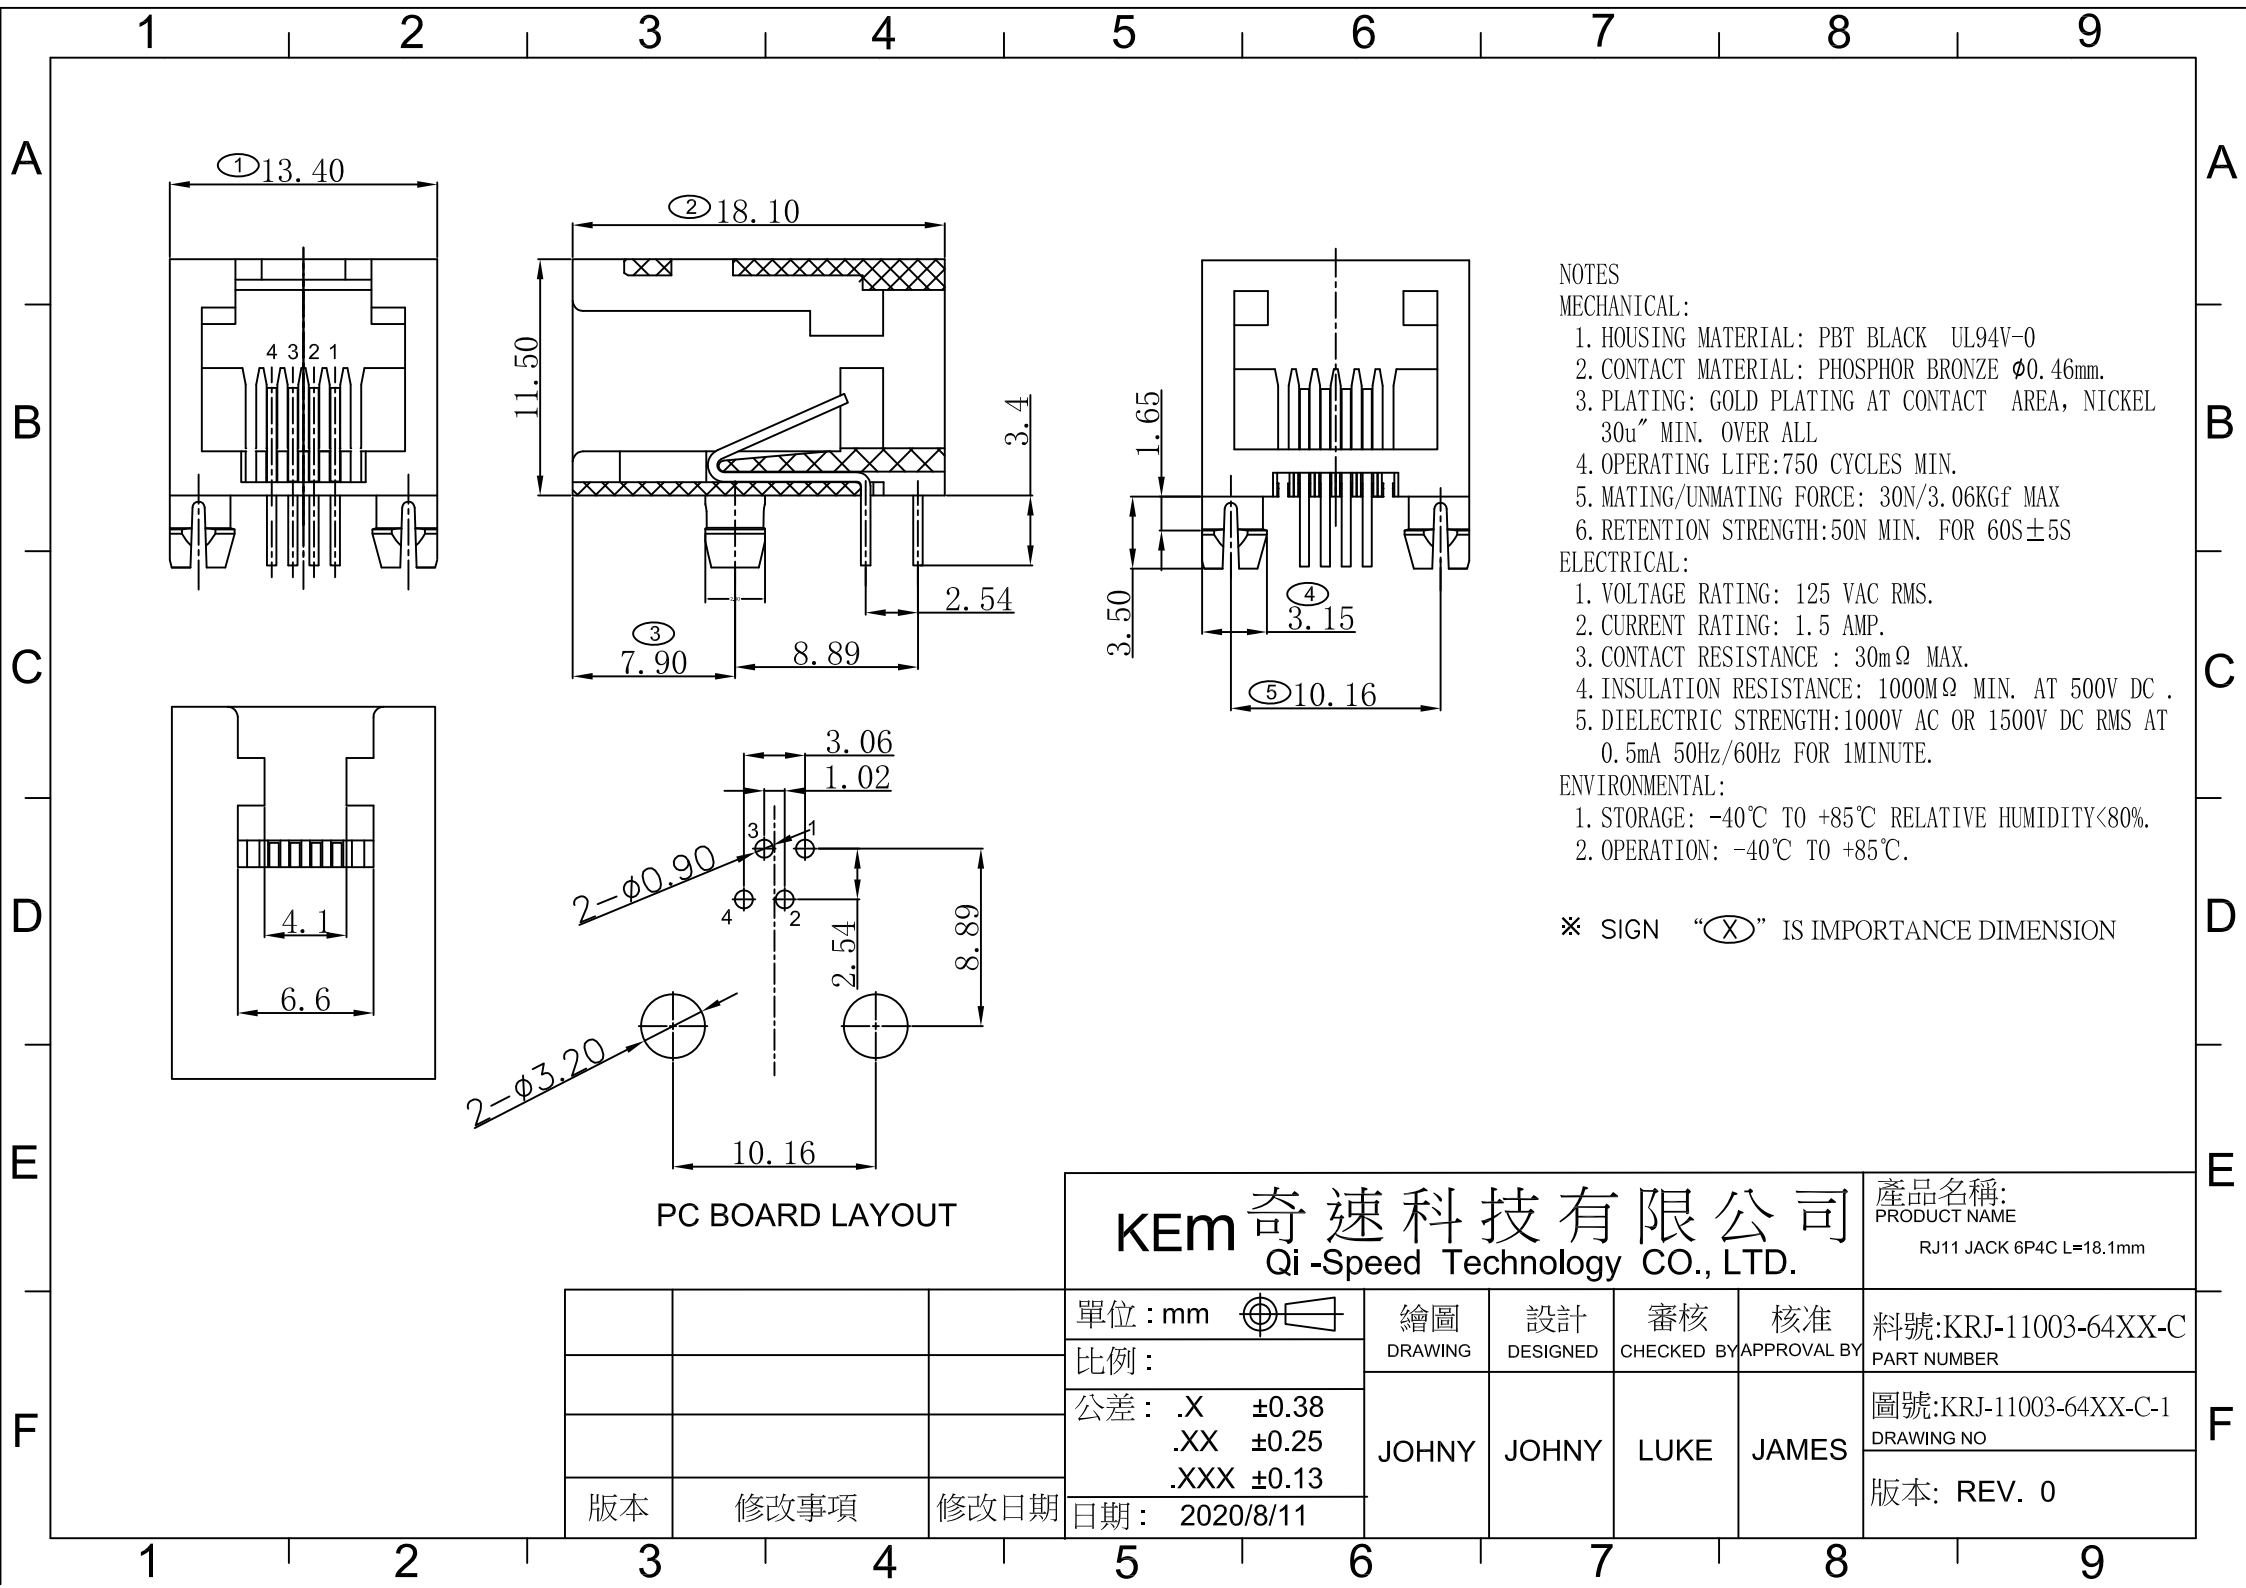




- NOTES
- MECHANICAL:
1. HOUSING MATERIAL: PBT BLACK UL94V-0
 2. CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
 3. PLATING: GOLD PLATING AT CONTACT AREA, NICKEL 30u" MIN. OVER ALL
 4. OPERATING LIFE: 750 CYCLES MIN.
 5. MATING/UNMATING FORCE: 30N/3.06KGf MAX
 6. RETENTION STRENGTH: 50N MIN. FOR 60S $\pm 5\text{S}$
- ELECTRICAL:
1. VOLTAGE RATING: 125 VAC RMS.
 2. CURRENT RATING: 1.5 AMP.
 3. CONTACT RESISTANCE : 30m Ω MAX.
 4. INSULATION RESISTANCE: 1000M Ω MIN. AT 500V DC .
 5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.
- ENVIRONMENTAL:
1. STORAGE: -40 $^{\circ}\text{C}$ TO +85 $^{\circ}\text{C}$ RELATIVE HUMIDITY<80%.
 2. OPERATION: -40 $^{\circ}\text{C}$ TO +85 $^{\circ}\text{C}$.

※ SIGN “(X)” IS IMPORTANCE DIMENSION

PC BOARD LAYOUT

KEM 奇速科技有限公司 Qi-Speed Technology CO., LTD.						產品名稱: PRODUCT NAME RJ11 JACK 6P4C L=18.1mm	
單位 : mm 		繪圖 DRAWING	設計 DESIGNED	審核 CHECKED BY	核准 APPROVAL BY	料號:KRJ-11003-64XX-C PART NUMBER	
比例 :		JOHNY	JOHNY	LUKE	JAMES	圖號:KRJ-11003-64XX-C-1 DRAWING NO	
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13						版本: REV. 0	
日期: 2020/8/11							