

1 2 3 4 5 6 7 8 9

A





B

C

D

E

F

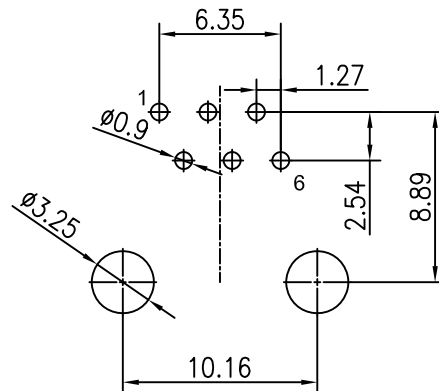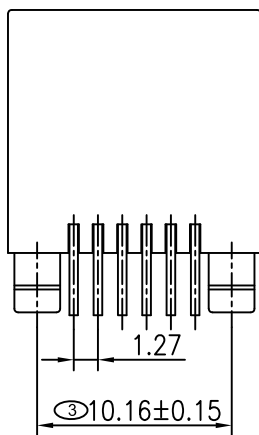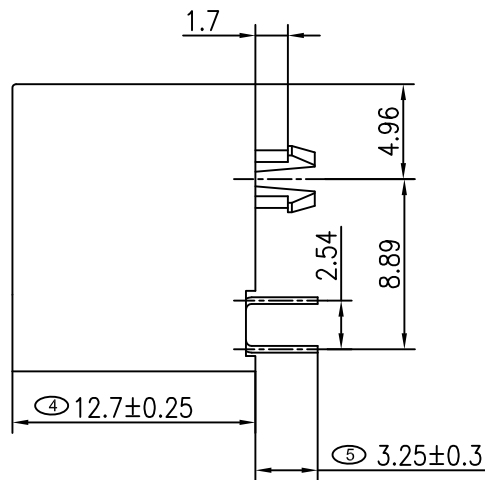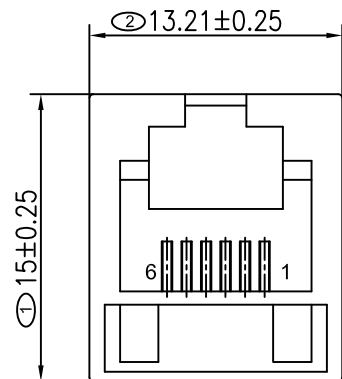

P.C.B LAYOUT TOP VIEW

#### NOTES

#### MECHANICAL:

1. HOUSING MATERIAL: PBT BLACK UL94V-0
2. INSERT MATERIAL: PBT BLACK UL94V-0
3. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35mm.
4. PLATING: GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100u" MIN, NICKEL 30u" MIN. OVER ALL
5. OPERATING LIFE: 750 CYCLES MIN.
6. MATING/UNMATING FORCE: 30N/3.06KGf MAX
7. RETENTION STRENGTH: 50N MIN. FOR 60S±5S

#### ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.

#### ENVIRONMENTAL:

1. STORAGE: -40℃ TO +85℃ RELATIVE HUMIDITY<80%.
2. OPERATION: -40℃ TO +85℃.

※ SIGN “(X)” IS IMPORTANCE DIMENSION

**KEM** 奇速科技有限公司  
Qi-Speed Technology CO., LTD.

產品名稱:  
PRODUCT NAME  
RJ11 JACK 1X1 6P6C 全塑  
无边 无台阶 H=12.7mm

單位 : mm



比例:

公差 : .X ±0.38  
.XX ±0.25  
.XXX ±0.13

日期 : 2021/7/6

繪圖

DRAWING

設計

DESIGNED

審核

CHECKED BY

核准

APPROVAL BY

JOHNY

JOHNY

LUKE

JAMES

料號: KRJ-11525-6606-C  
PART NUMBER

圖號: KRJ-11525-6606-C-1  
DRAWING NO

版本: REV. 0

版本

修改事項

修改日期

1 2 3 4 5 6 7 8 9