


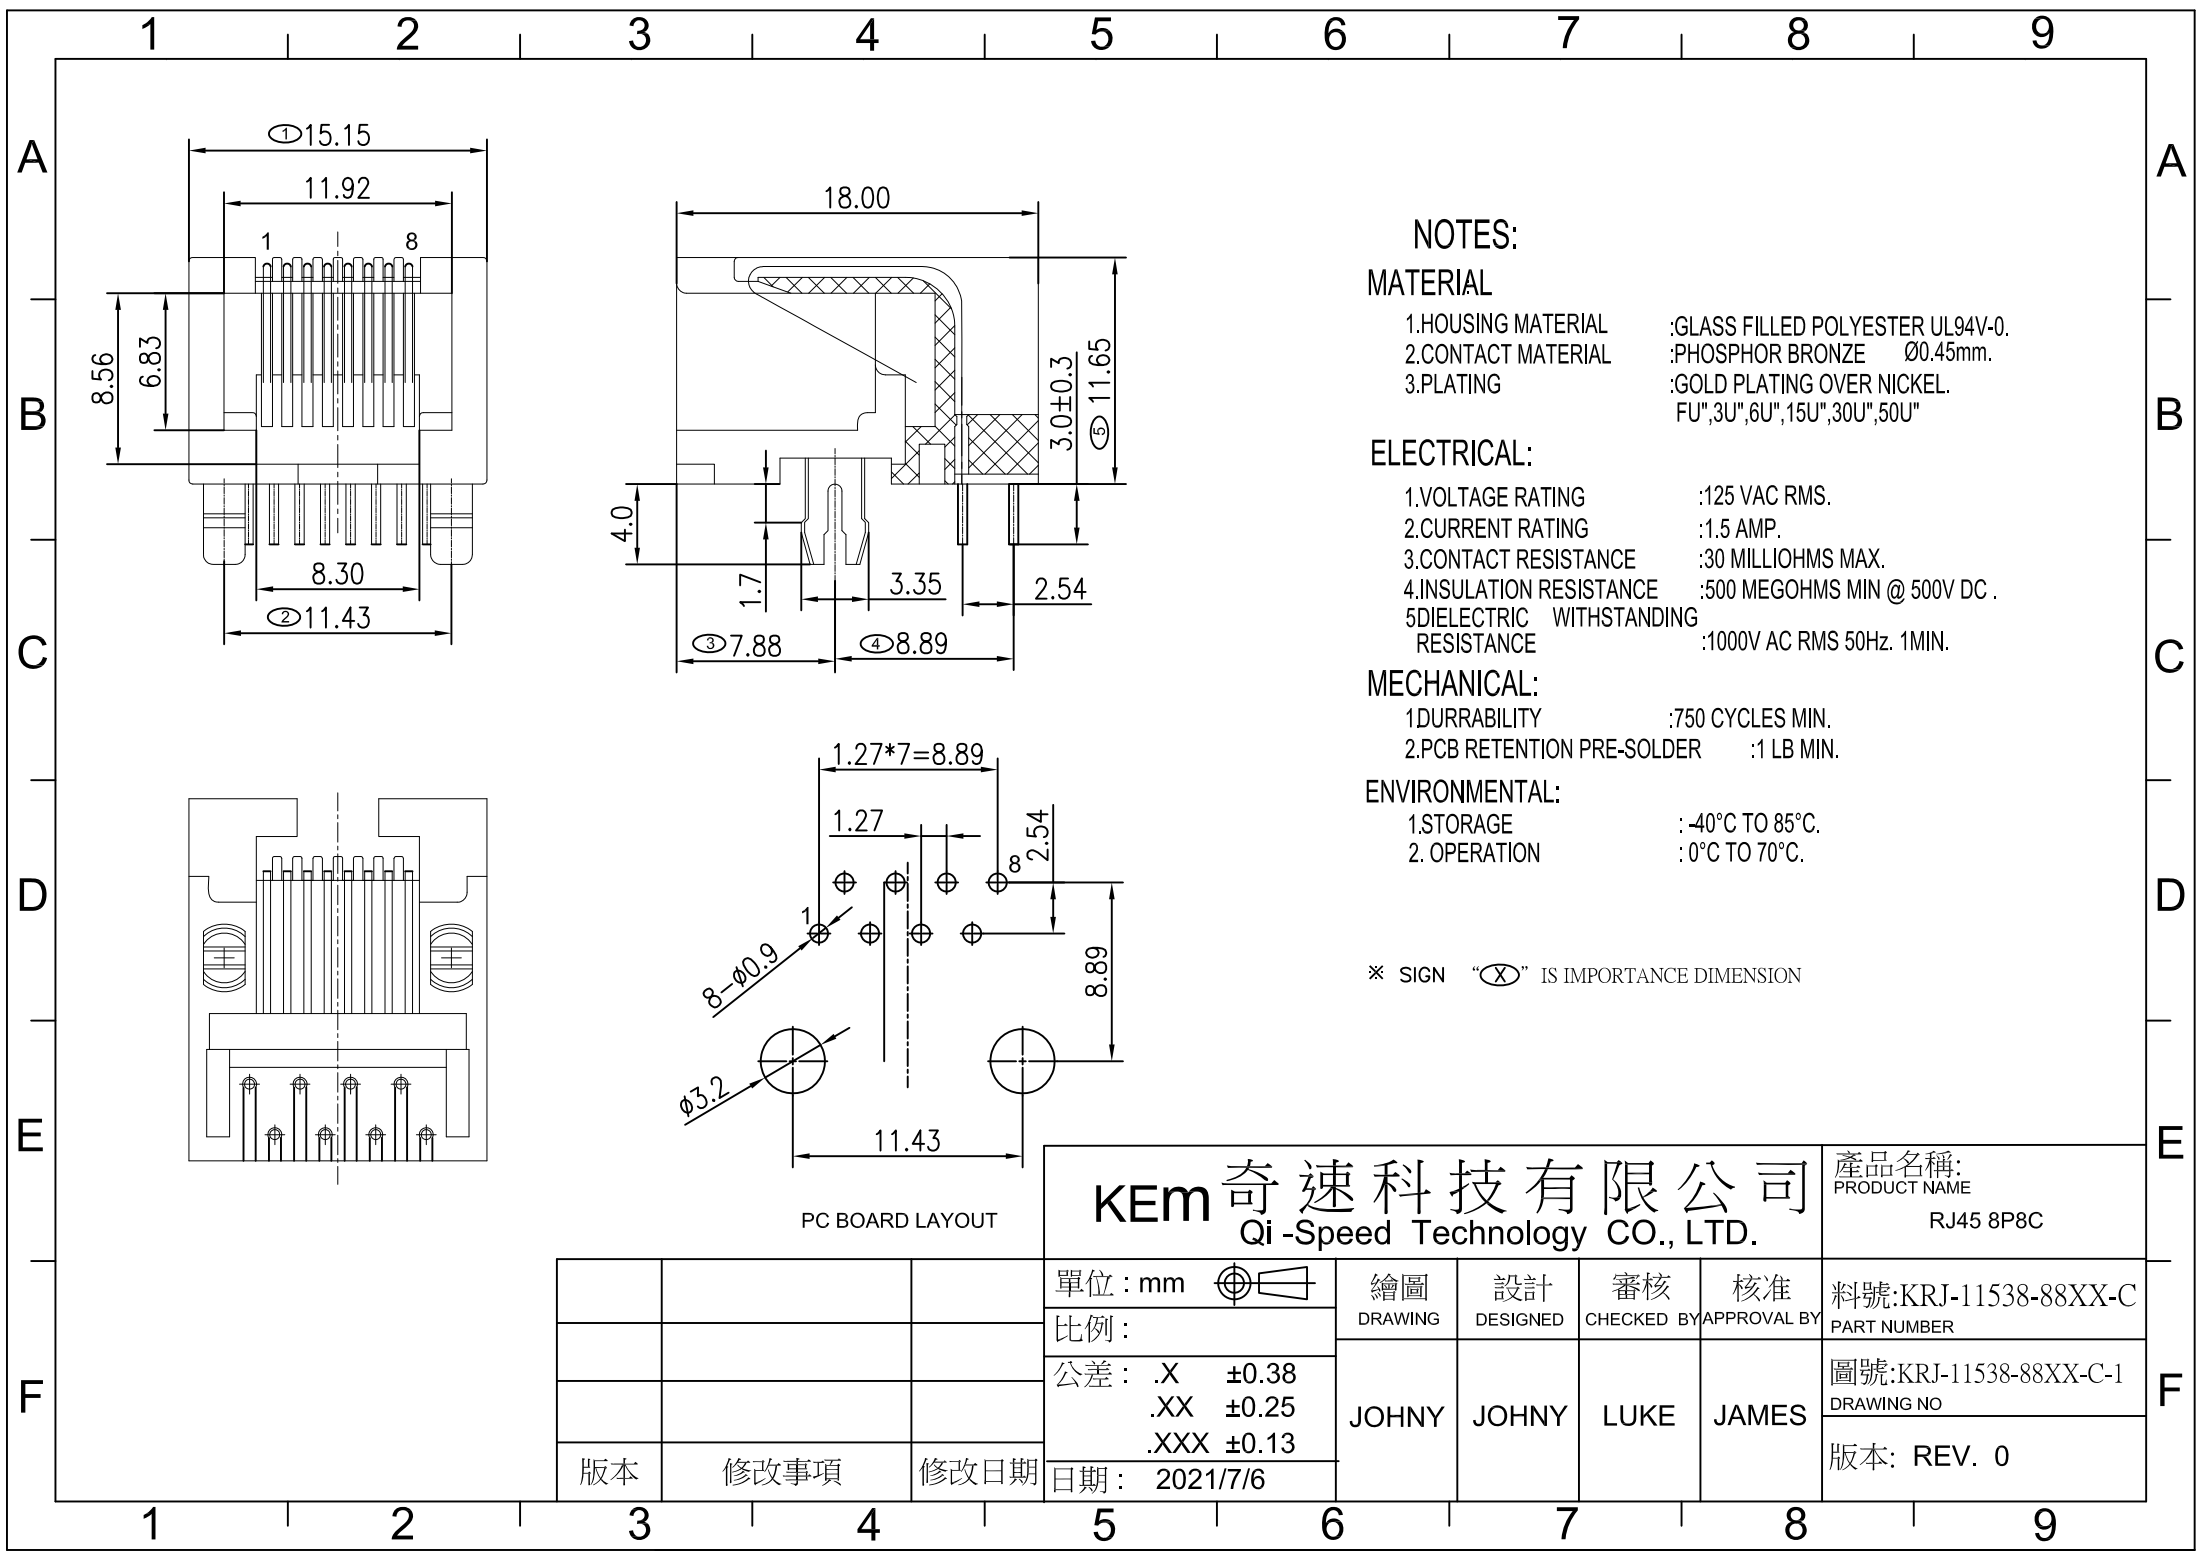

NOTES:

MATERIAL

1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL :PHOSPHOR BRONZE Ø0.45mm.
3.PLATING :GOLD PLATING OVER NICKEL.
FU",3U",6U",15U",30U",50U"

ELECTRICAL:

1.VOLTAGE RATING :125 VAC RMS.
2.CURRENT RATING :1.5 AMP.
3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1DURRABILITY :750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1.STORAGE : -40°C TO 85°C.
2. OPERATION : 0°C TO 70°C.

※ SIGN “(X)” IS IMPORTANCE DIMENSION

			KEM奇速科技有限公司 Qi-Speed Technology CO., LTD.				產品名稱: PRODUCT NAME RJ45 8P8C	
			單位 : mm	繪圖 DRAWING	設計 DESIGNED	審核 CHECKED BY	核准 APPROVAL BY	料號:KRJ-11538-88XX-C PART NUMBER
			比例:					圖號:KRJ-11538-88XX-C-1 DRAWING NO
			公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	版本: REV. 0
版本	修改事項	修改日期	日期: 2021/7/6					