
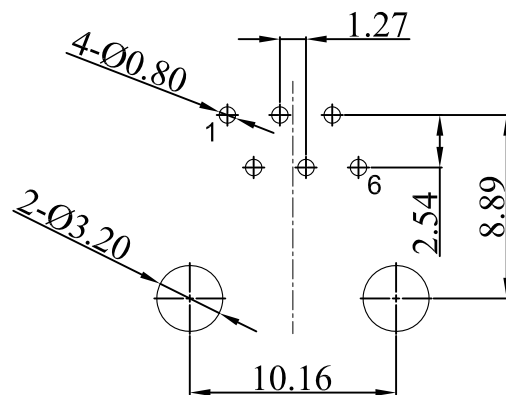
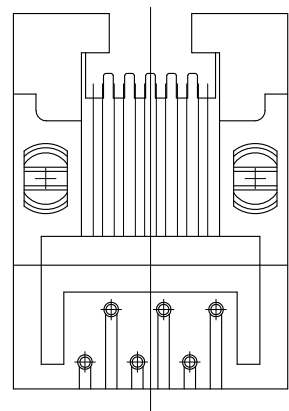
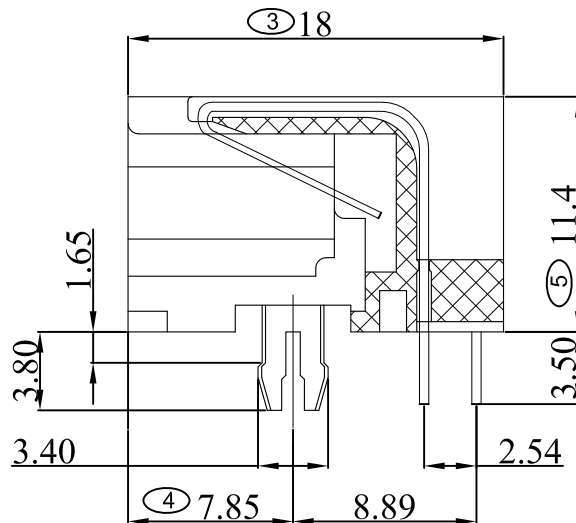


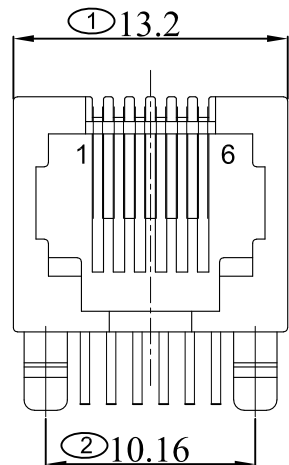

PC BOARD LAYOUT

NOTES

MATERIAL

1. HOUSING MATERIAL : PBT BLACK UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER: 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ RELATIVE HUMIDITY<70%.
2. OPERATION : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

* SIGN "X" IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

RJ11 6P6C 1X1 全塑

單位 : mm	繪圖	設計	審核	核准	料號:KRJ-11611-66XX-C
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ± 0.38	JOHNY	JOHNY	LUKE	JAMES	圖號:KRJ-11611-66XX-C-1
.XX ± 0.25					DRAWING NO
.XXX ± 0.13					版本: REV. 0
日期 : 2020/7/16					

版本	修改事項	修改日期