
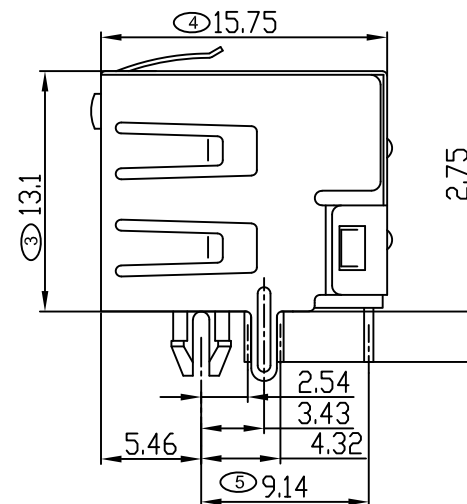


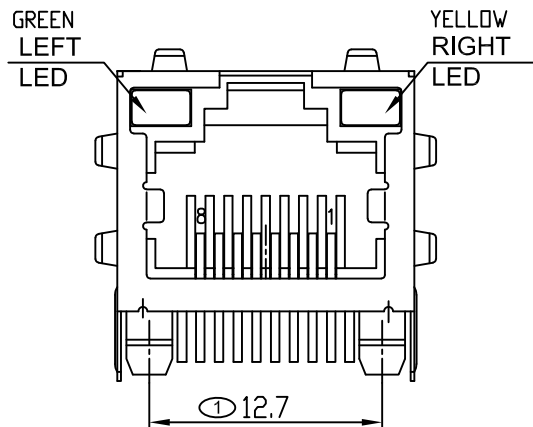

NOTES

MATERIAL

- | | |
|---------------------|------------------------------------|
| 1. HOUSING MATERIAL | : PBT BLACK UL94V-0. |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE $\phi 0.46$ mm. |
| 3. PLATING | : GOLD PLATING OVER NICKEL. |
| 4. SHILED | : COPPER ALLOY WITH NICKEL PLATED. |

ELECTRICAL

- | | |
|--------------------------|-------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP. |
| 3. CONTACT RESISTANCE | : 30 MILLIOHMS MAX. |
| 4. INSULATION RESISTANCE | : 500 MEGOHMS MIN @ 500V DC . |
| 5. DIELECTRIC RESISTANCE | : 1000V AC RMS 50Hz. 1MIN. |




MECHANICAL

- | | |
|----------------------------|-------------------|
| 1. DURRABILITY | : 750 CYCLES MIN. |
| 2. PCB RETENTIONPRE-SOLDER | : 1 LB MIN. |

ENVIRONMENTAL:

- | | |
|--------------|------------------|
| 1. STORAGE | : -40°C ~ +85°C. |
| 2. OPERATION | : -40°C ~ +85°C. |

※ SIGN “(X)” IS IMPORTANCE DIMENSION

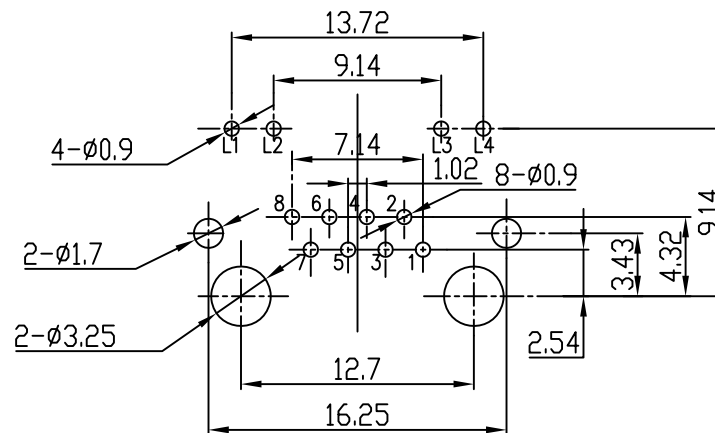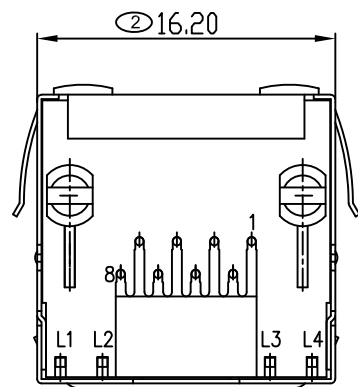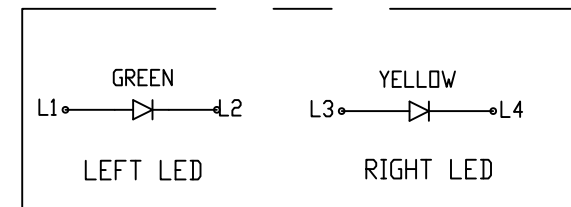

PC Board Layout

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

RJ45 JACK 8P8C 1X1
屏蔽三面外彈 左綠右黃灯

單位 : mm	繪圖	設計	審核	核准	料號:KRJ-125111-88XX-GY-C
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38	JOHNY	JOHNY	LUKE	JAMES	圖號:KRJ-125111-88XX-GY-C-1
.XX ±0.25					DRAWING NO
.XXX ±0.13					版本: REV. 0
日期 : 2020/7/1					

版本	修改事項	修改日期