



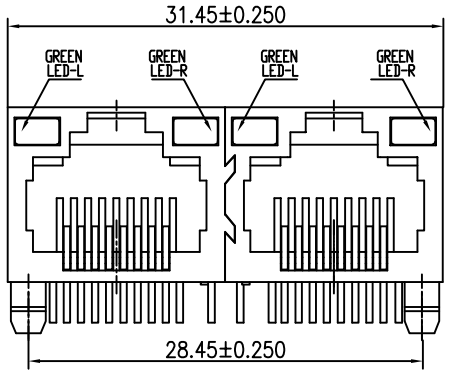


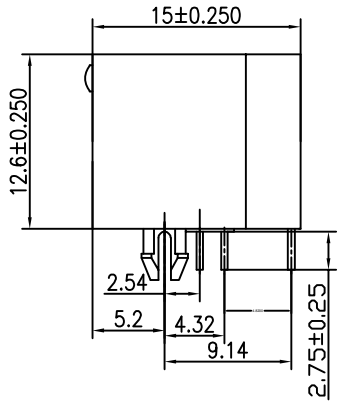

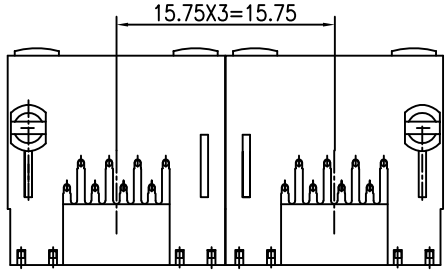

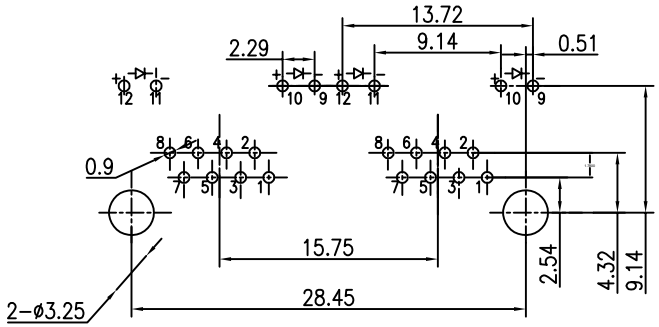

PC Board Layout



NOTES

MATERIAL

1.HOUSING MATERIAL : PBT UL94V-0

2.CONTACT MATERIAL : PHOSPHOR BRONZE T=0.3mm.

3.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN OVER NICKEL.

4.SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL

1.VOLTAGE RATING : 125 VAC RMS.

2.CURRENT RATING : 1.5 AMP.

3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.

4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .

5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1.DURRABILITY : 750 CYCLES MIN.

2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1.STORAGE : -40℃～+85℃.

2.OPERATION : -20℃～+70℃.

版本	修改事項	修改日期

KEm 奇速科技有限公司
Qi -Speed Technology CO., LTD.

單位 : mm	繪圖 DRAWING	設計 DESIGNED	審核 CHECKED BY	核准 APPROVAL BY
比例 :				
公差 : .X ±0.30 .XX ±0.25 .XXX ±0.15	JOHNY	JOHNY	LUKE	JAMES
日期 : 2021/02/17				

產品名稱: PRODUCT NAME
RJ45 JACK 全塑 左綠右綠

料號:KRJ-22125-88XX-GG-C PART NUMBER

圖號:KRJ-22125-88XX-GG-C-1 DRAWING NO

版本: REV. 0