
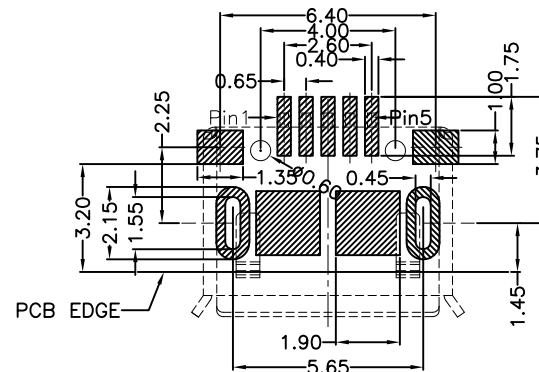
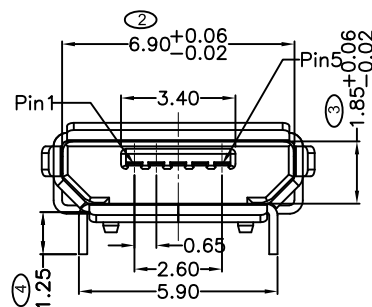


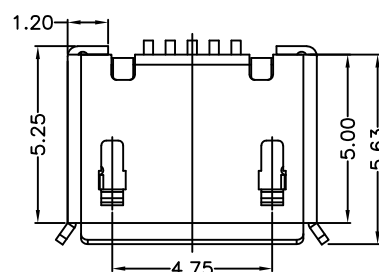



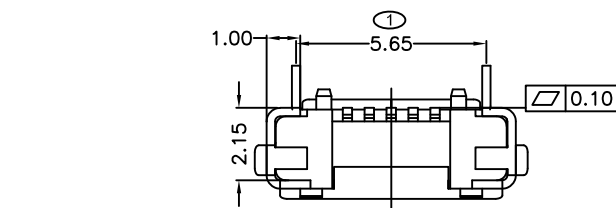

RECOMMENDED PCB LAYOUT
PCB图仅供参考

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kg Max.
- 2.6 Total unmating force: 1.0 Kg Min.
- 2.7 Temperature range: -30°C~85°C

※ SIGN "X" IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

MICRO USB 5P/F B Type
加焊脚5.9mm脚长1.25mm有柱有卷边

單位: mm



比例:

公差: .X ±0.38
.XX ±0.25
.XXX ±0.13

日期: 2023/8/18

繪圖
DRAWING

設計
DESIGNED

審核
CHECKED BY

核准
APPROVAL BY

JOHNY

JOHNY

LUKE

JAMES

料號:KMR1-MD05SMB1T-039A
PART NUMBER

圖號:KMR1-MD05SMB1T-039A-1
DRAWING NO

版本: REV. 0

版本

修改事項

修改日期