
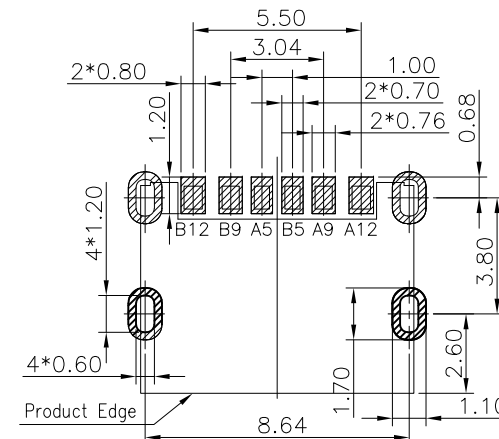



1 2 3 4 5 6 7 8 9

A

A

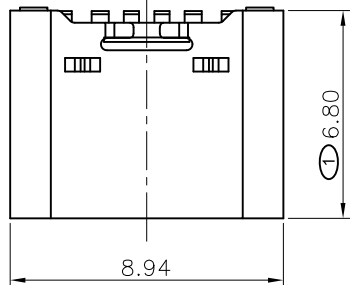

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

NOTES:




SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

※ SIGN “ $\otimes$ ” IS IMPORTANCE DIMENSION

TABLE:

3	SHELL	STAINLESS STEEL	NI: 50u" Plated	1SET
2	CONTACT	COPPER ALLOY	AUTU" PLATING ON CONTACT AREA; TIN TING ON SOLDER TAIL; NI UNDERPLATING OVERALL	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

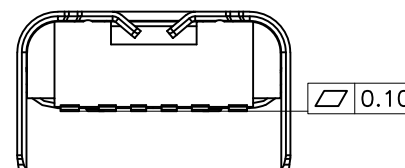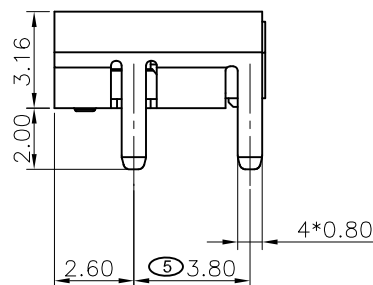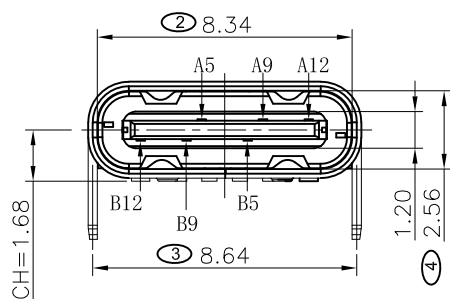

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

C

C

D

D

E

E

F

F

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
USB TYPE C 6PF SMT 板上母座

單位: mm $\otimes$	繪圖	設計	審核	核准	料號: KUSBC003-F001
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ± 0.38 .XX ± 0.25 .XXX ± 0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KUSBC003-F001-1
日期: 2019/6/12					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0