

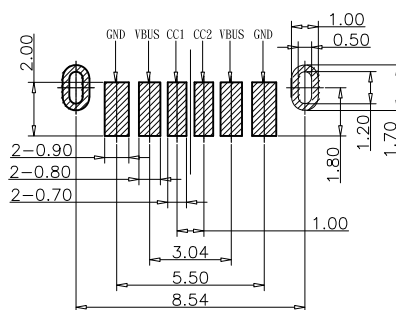
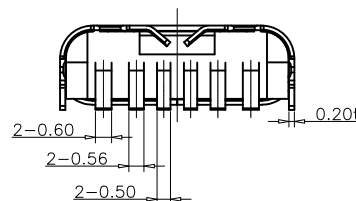

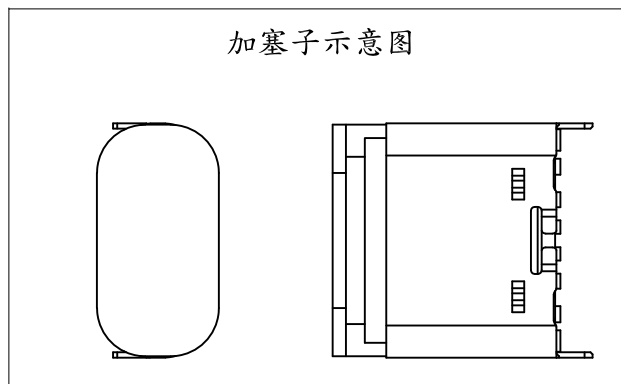





RECOMMEND P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



NOTES:
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

※ SIGN "X" IS IMPORTANCE DIMENSION

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TABLE:

5	COVER	LCP	BLACK	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NO Plated	1PCS
3	SHELL	STAINLESS STEEL	Ni: 50u" Plated	1PCS
2	CONTACT	COPPER ALLOY	Au1u"/Ni: 50u" Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
USB C F 單排6PIN直立式SMT L=6.5

			單位: mm	繪圖	設計	審核	核准	料號: KUSBC057-F001
			比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
			公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KUSBC057-F001-1 DRAWING NO
版本	修改事項	修改日期	日期: 2020/4/10					版本: REV. 0