
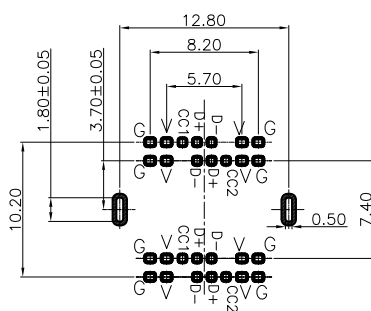

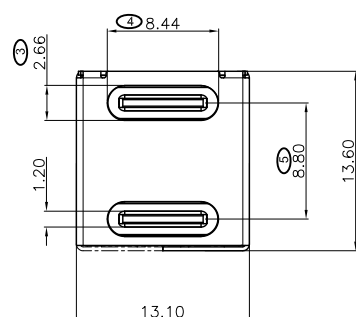



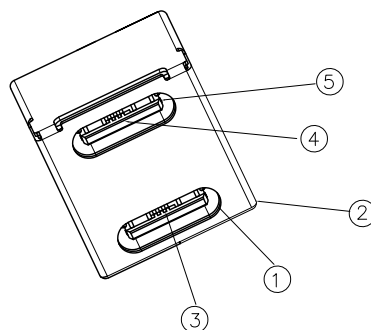


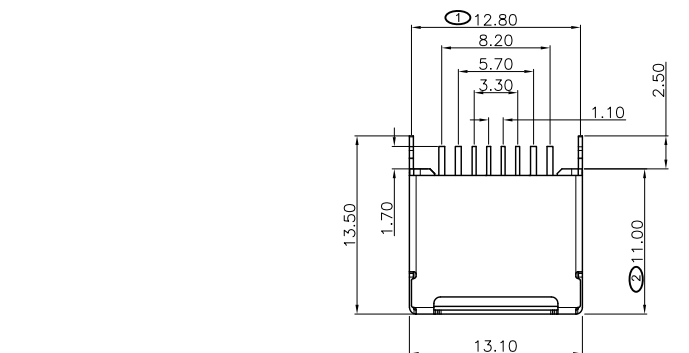

Recommended P.C.B Layout
Tolerance: ±0.05

PIN DEFINITION FRONT VIEW

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND			VBus		D-	D+	CC	VBus			GND
GND			VBus	Vconn				VBus			GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

备注 (NOTES) :

- 机械性能:
 - 插入力: 5~20N.
 - 拔出力: 5~20N
 - 耐久寿命: 1000 CYCLES.
- 电气性能:
 - 额定电流: 5A MAX .
 - 额定电压: 30V MAX.
 - 耐电压: 100V AC.
 - 接触阻抗: 40mΩ MAX (Initial) , 50mΩ MAX (5千次试验后) .
 - 绝缘阻抗: 100MΩ MIN.
- 环境温度:
 - 温度范围: -30° C ~ +85° C.

※ SIGN “(X)” IS IMPORTANCE DIMENSION

⑤	TYPE C中心片	SUS		
④	TYPE C Moding	LCP+30GF	BLACK	UL 94V-0
③	TYPE C端子	C2680-H	—	GOLD:G/F Tin 80-120u”Ni:30u”
②	外壳	C2680-H	—	Ni :40-60”
①	主体胶芯	LCP+30GF	BLACK	UL 94V-0
序号	描述	材质	颜色	备注

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
USB TYPE C FEMALE雙層14P 180度

單位 : mm	繪圖	設計	審核	核准	料號: KUSBC066-F001
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KUSBC066-F001-1 DRAWING NO
日期 : 2021/11/21					版本: REV. 0

版本	修改事項	修改日期