

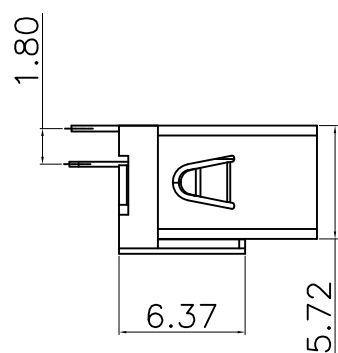

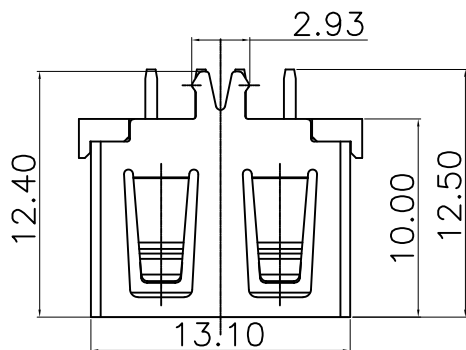



SECTION A-A

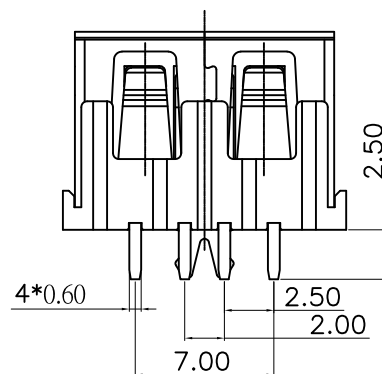

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

PRODUCT NUMBER CODE

KUAD009A - 4 XX 2 X 0
① ② ③ ④ ⑤ ⑥

1. PRODUCT CODE:
KUAD009A: USB A TYPE PLUG CONN.
2. POSITIONS:
4: 4 POSITIONS
3. INSULATOR COLOR OR HOUSING:
W: WHITE P: PBT
K: BLACK L: LCP
4. CONTACT PLATING THICKNESS:
2: CONTACT PLATED GOLD IN MATING AREA; TIN ON SOLDER TALLS.
5. SHELL PLATING:
1: SPCC; NICKEL PLATING.
2: COPPER ALLOY C2680; NICKEL PLATING.
6. MATERIAL OF CONTACT:
0: COPPER ALLOY C2680

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
USB-A/F10MM短体
180度側边叉脚無卷边

單位: mm	繪圖	設計	審核	核准	料號: KUAD009A-4XX2X0
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KUAD009A-4XX2X0-1 DRAWING NO
日期: 2013/5/13					版本: REV. 0