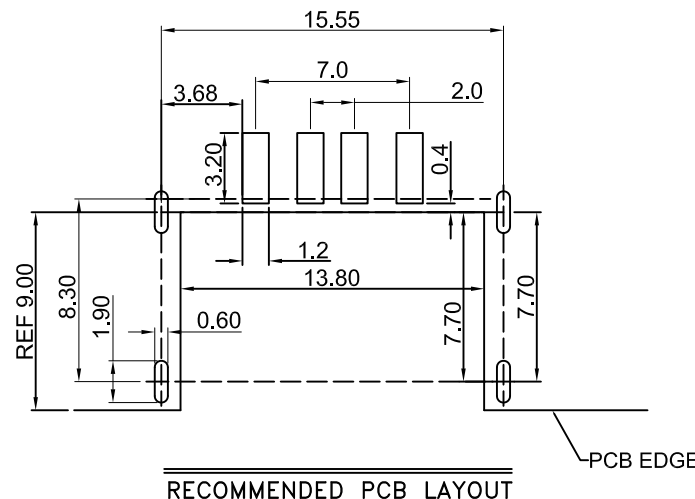
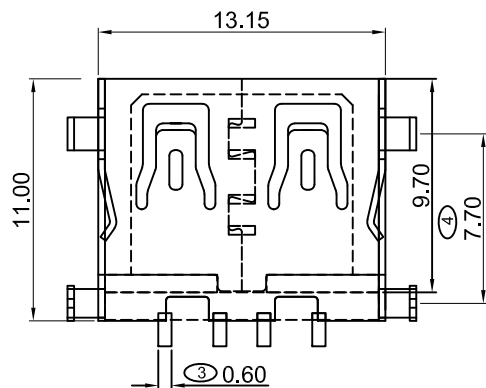
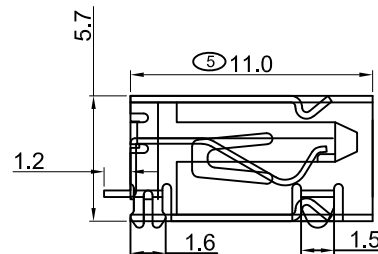
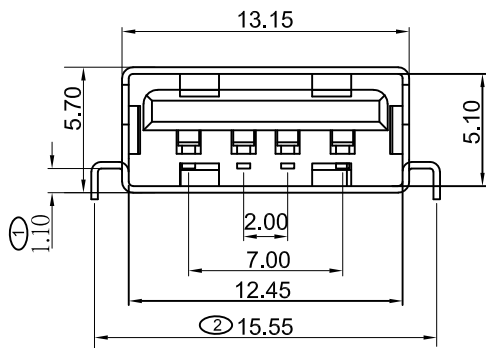


规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触电阻: Contact Resistance
30 milliohms MAX
4. 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)

PRODUCT NUMBER CODE

KUAS461 - 4 XX 2 1 0
① ② ③ ④ ⑤

1. PRODUCT CODE:
KUAS461: USB A TYPE PLUG CONN.
2. POSITIONS:
4: 4 POSITIONS
3. INSULATOR COLOR OR HOUSING:
W: WHITE L: LCP
K: BLACK
4. CONTACT PLATING THICKNESS:
2: CONTACT PLATED GOLD IN MATING AREA; TIN ON SOLDER TALLS.
5. SHELL PLATING:
1: SPCC; NICKEL PLATING.
6. MATERIAL OF CONTACT:
0: COPPER ALLOY C2680

※ SIGN "ⓧ" IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

USB A/F 短体沉板 1.1 平口 SMT

單位: mm	繪圖	設計	審核	核准	料號: KUAS461-4XL210
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KUAS461-4XL210-1
日期: 2022/6/30					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0