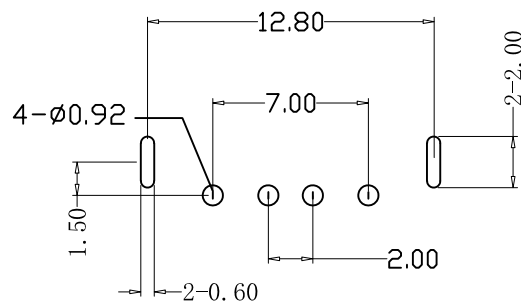
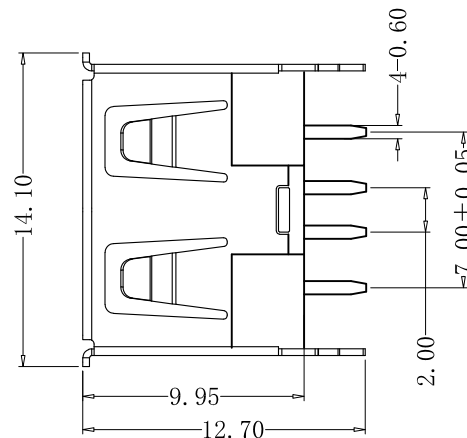
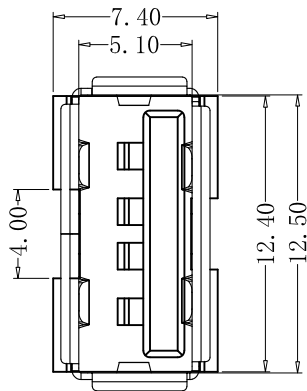


NOTES:

Housing: Thermoplastics,UL94V-0
 Contact: Copper Alloy
 Shell: Copper Alloy/Steel
 Voltage Current Rating:1.5 AMP. 30V AC
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:30 M Ω Max.
 Dielectric Withstanding Voltage:500W AC
 Temperature Range:-35°C to +85°C
 Insulator color: Black/White
 Plastic material:PBT/LCP/Others
 Shell finish:Nickel plated/Tin-Lead plated
 Mechanical:
 Mating Force:3.5KG MAX
 Unmating Force:0.7 KG MIN.

PRODUCT NUMBER CODE

KUAD025-4XX2X0

① ②

- INSULATOR COLOR OR HOUSING:
 W:WHITE P:PBT
 K:BLACK L:LCP
- SHELL PLATING:
 1:STEEL
 2:COPPER ALLOY

KEM 奇速科技有限公司
 Qi-Speed Technology CO., LTD.

產品名稱:
 PRODUCT NAME

USB AF L=10.0mm 180度鱼叉脚有边

單位: mm



比例:

公差: .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.15

日期: 2016/10/27

繪圖
 DRAWING

設計
 DESIGNED

審核
 CHECKED BY

核准
 APPROVAL BY

JOHNY

JOHNY

LUKE

JAMES

料號:KUAD025-4XX2X0
 PART NUMBER

圖號:KUAD025-4XX2X0-1
 DRAWING NO

版本: REV. 0

版本

修改事項

修改日期