


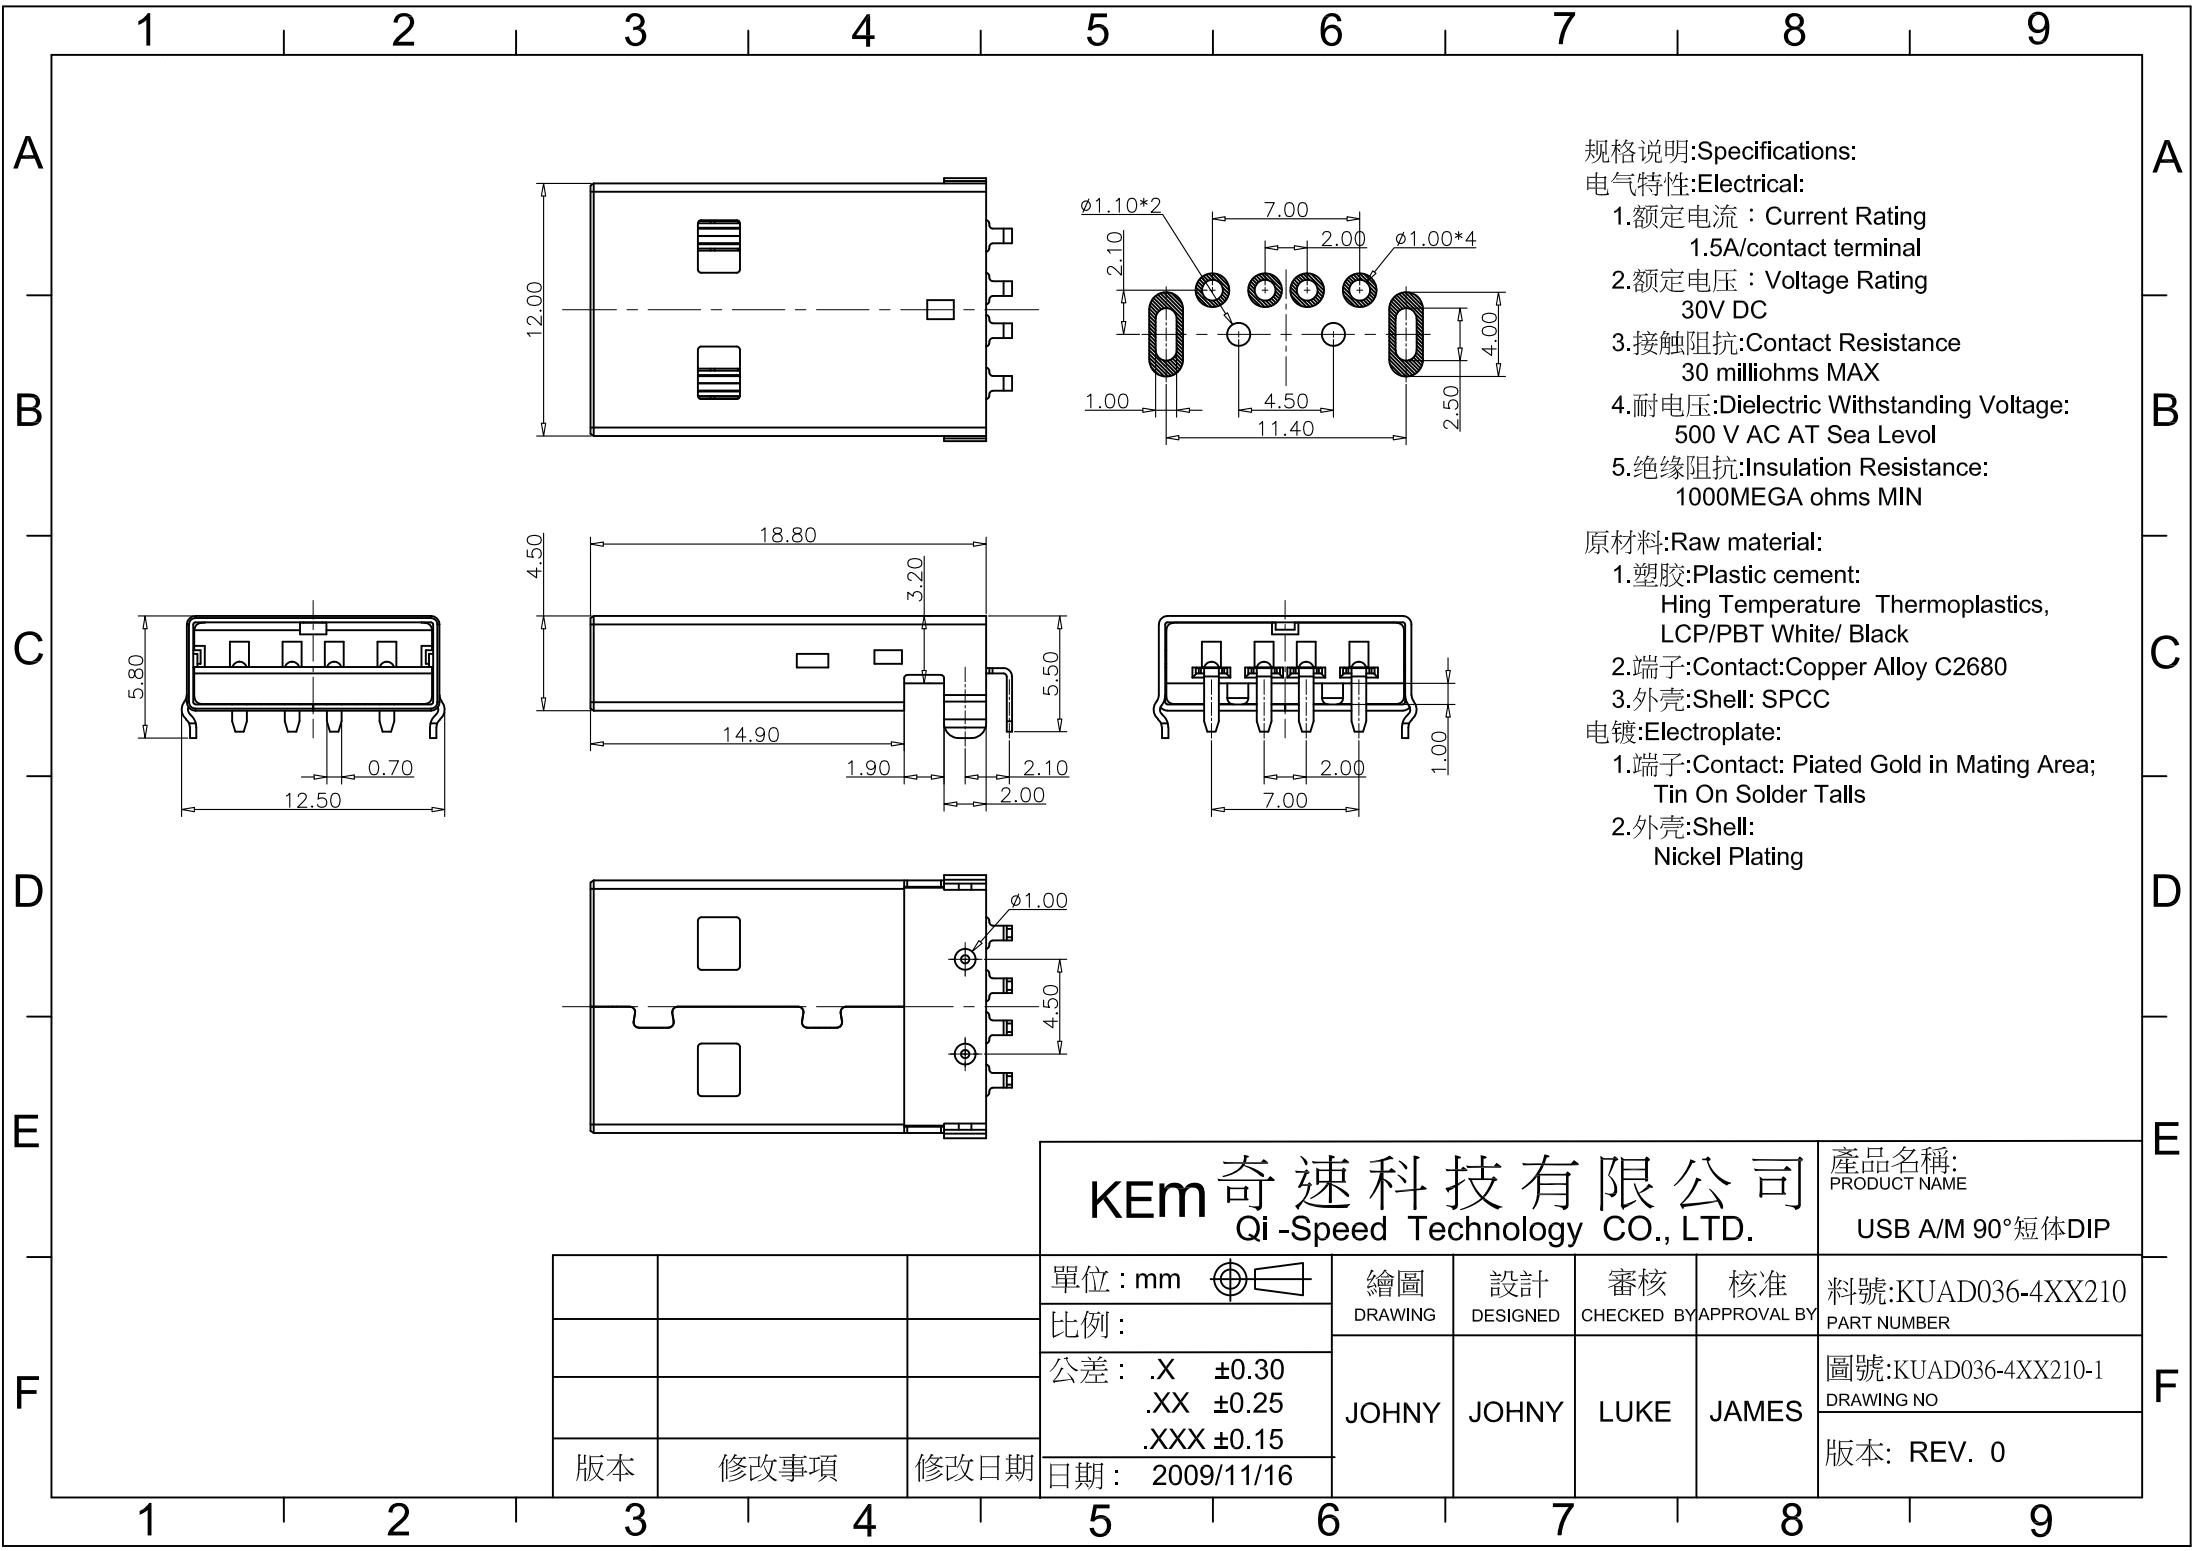

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流 : Current Rating
1.5A/contact terminal
- 2.额定电压 : Voltage Rating
30V DC
- 3.接触阻抗:Contact Resistance
30 milliohms MAX
- 4.耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5.绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

原材料:Raw material:

- 1.塑胶:Plastic cement:
Hing Temperature Thermoplastics,
LCP/PBT White/ Black
- 2.端子:Contact:Copper Alloy C2680
- 3.外壳:Shell: SPCC

电镀:Electroplate:

- 1.端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 2.外壳:Shell:
Nickel Plating

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
USB A/M 90°短体DIP

			單位 : mm	繪圖	設計	審核	核准	料號:KUAD036-4XX210
			比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
			公差 : .X ±0.30 .XX ±0.25 .XXX ±0.15	JOHNY	JOHNY	LUKE	JAMES	圖號:KUAD036-4XX210-1
版本	修改事項	修改日期	日期: 2009/11/16					版本: REV. 0