


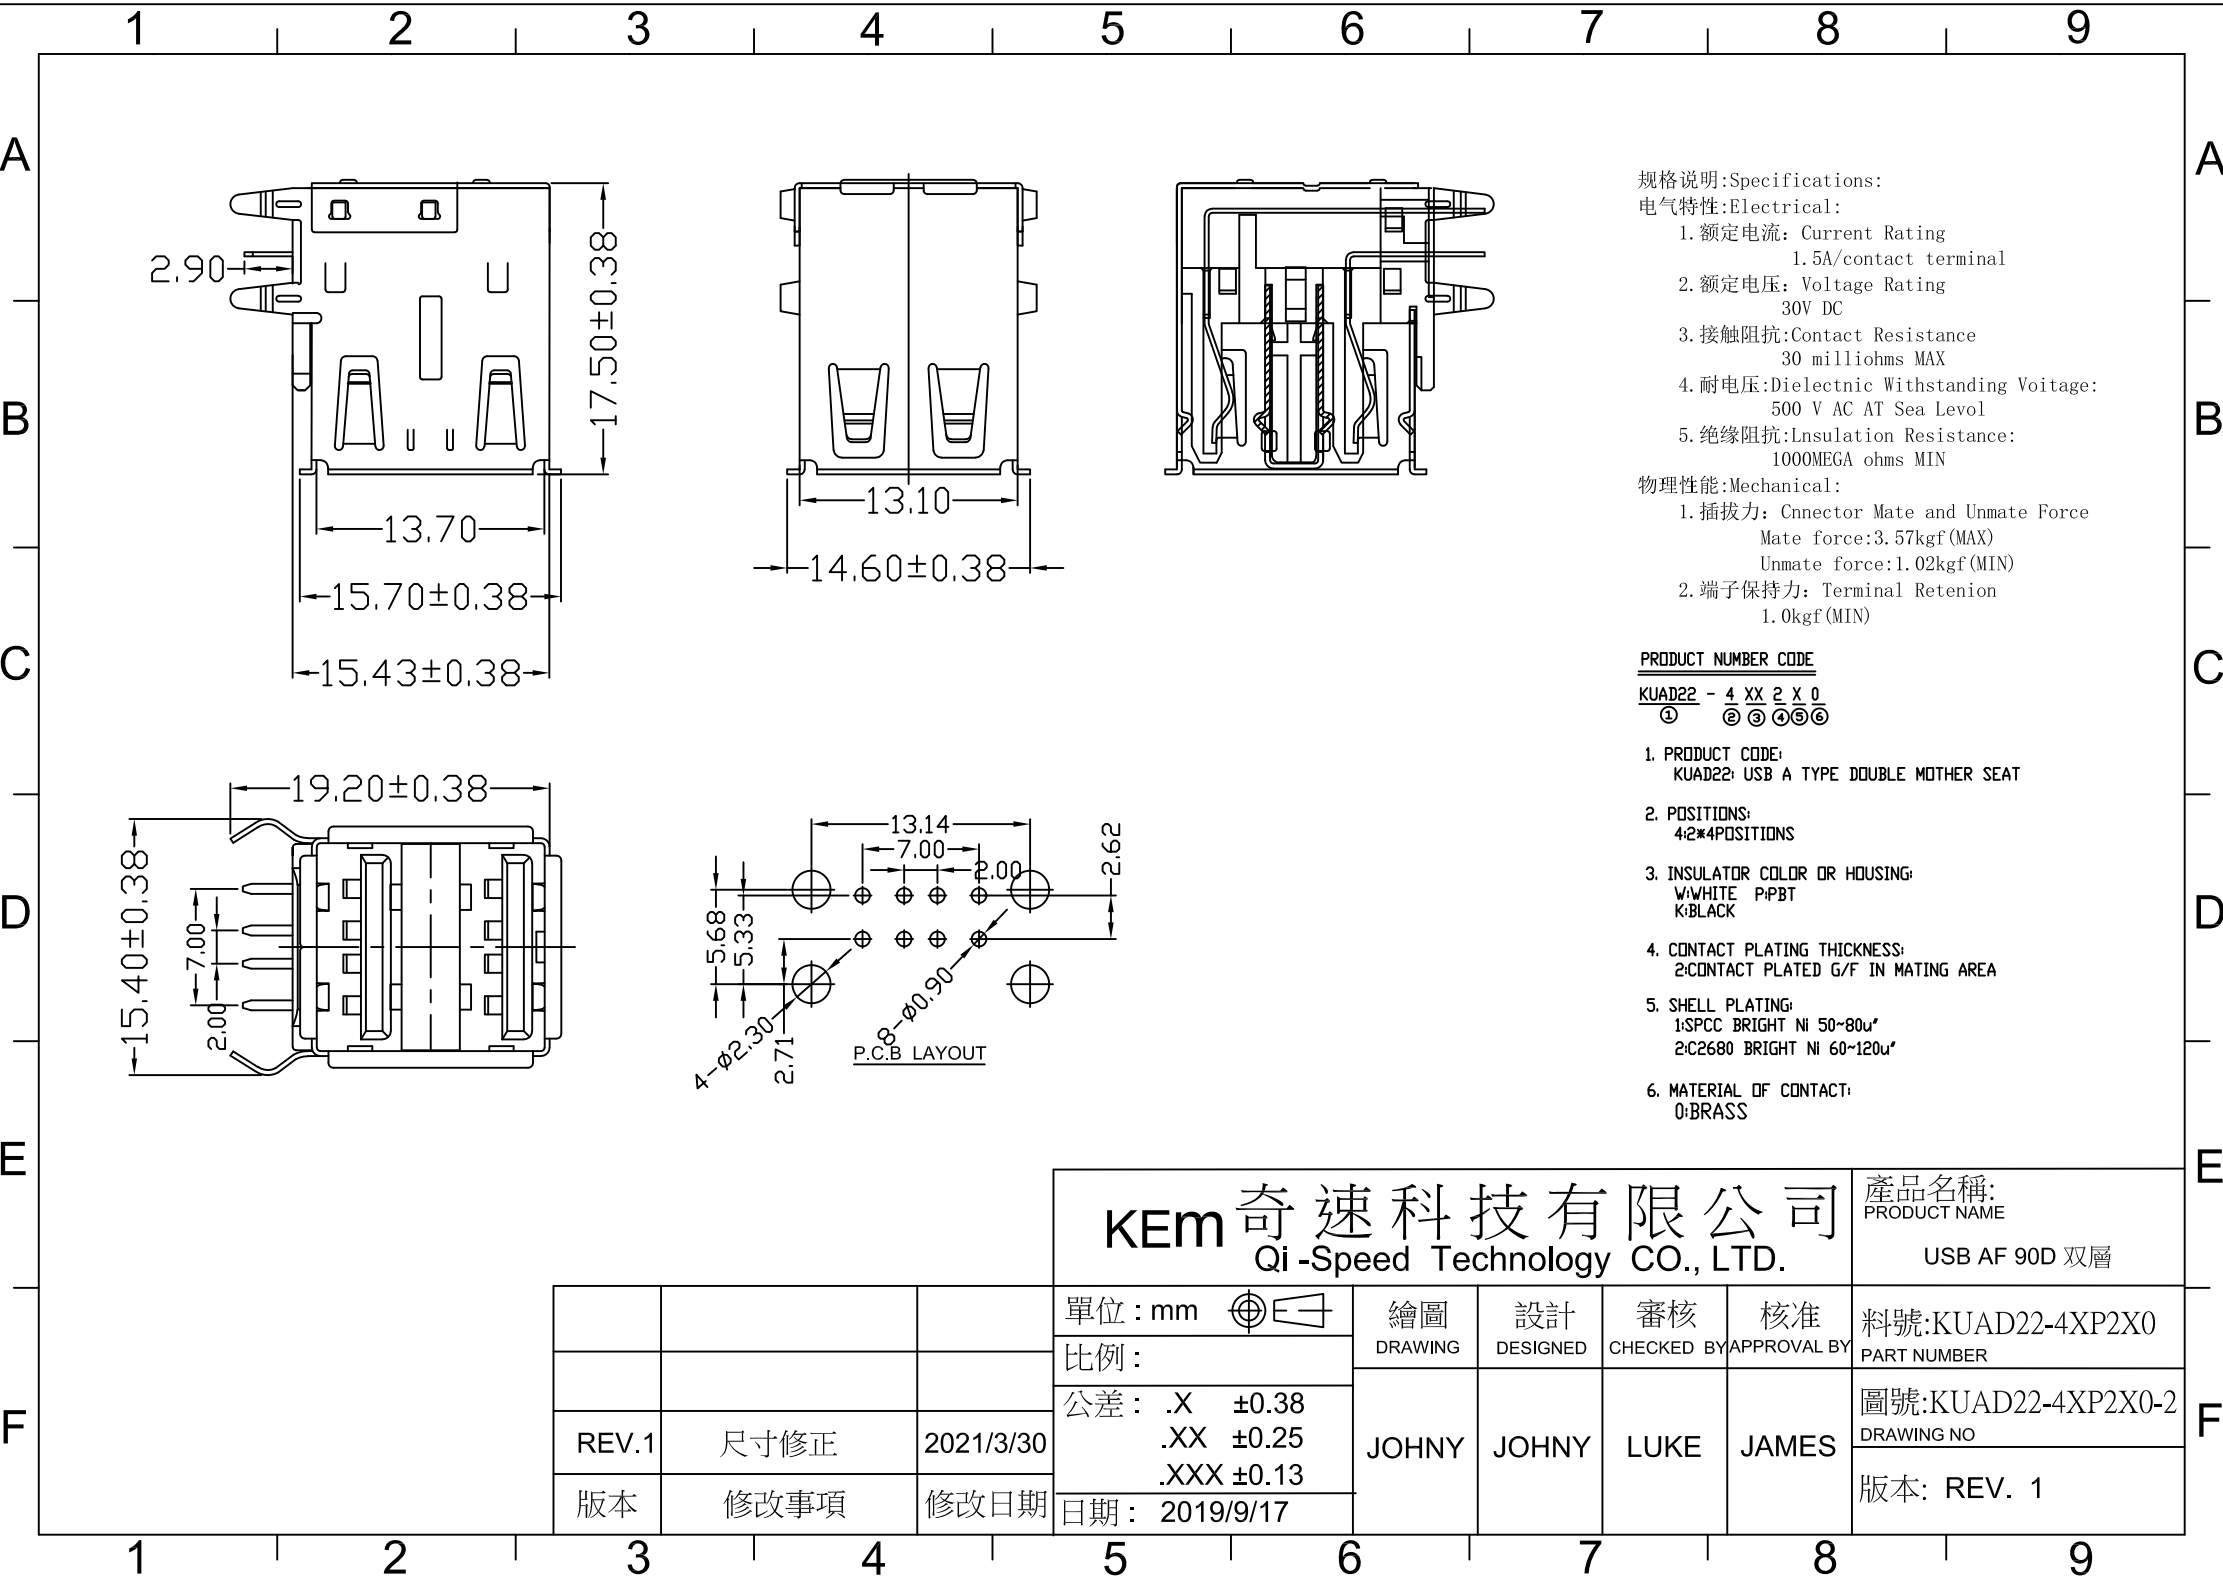

规格说明:Specifications:
电气特性:Electrical:
1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN
物理性能:Mechanical:
1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retenion
1.0kgf(MIN)

PRODUCT NUMBER CODE
KUAD22 - 4 XX 2 X 0
① ② ③ ④ ⑤ ⑥
1. PRODUCT CODE:
KUAD22: USB A TYPE DOUBLE MOTHER SEAT
2. POSITIONS:
4:2*4POSITIONS
3. INSULATOR COLOR OR HOUSING:
W:WHITE P:PB
K:BLACK
4. CONTACT PLATING THICKNESS:
2:CONTACT PLATED G/F IN MATING AREA
5. SHELL PLATING:
1:SPCC BRIGHT NI 50~80u"
2:C2680 BRIGHT NI 60~120u"
6. MATERIAL OF CONTACT:
0:BRASS

			KEM奇速科技有限公司 Qi-Speed Technology CO., LTD.				產品名稱: PRODUCT NAME USB AF 90D 雙層	
			單位: mm	繪圖 DRAWING	設計 DESIGNED	審核 CHECKED BY	核准 APPROVAL BY	料號:KUAD22-4XP2X0 PART NUMBER
			比例:					圖號:KUAD22-4XP2X0-2 DRAWING NO
REV.1	尺寸修正	2021/3/30	公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	版本: REV. 1
版本	修改事項	修改日期	日期: 2019/9/17					