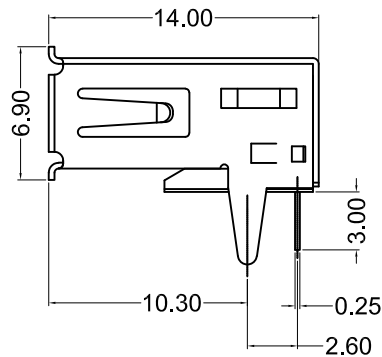
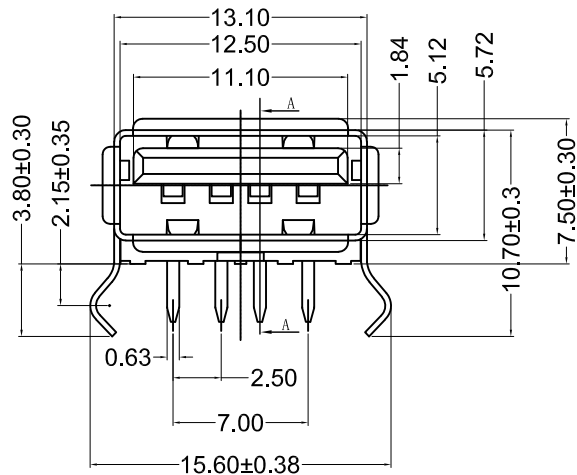


规格说明:Specifications:

电气特性:Electrical:



1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

PRODUCT NUMBER CODE

KUAD45 - 4 XP 2 X 0

① ② ③ ④ ⑤ ⑥

1. PRODUCT CODE:
KUAD45: USB A TYPE PLUG CONN.
2. POSITIONS:
4:4 POSITIONS
3. INSULATOR COLOR OR HOUSING:
WP:WHITE PBT UL94V-0
KP:BLACK PBT
4. CONTACT PLATING THICKNESS:
2:CONTACT PLATED G/F IN MATING AREA
5. SHELL PLATING:
1:SPCC PLATED NICKEL
2:C2680 PLATED NICKEL
6. MATERIAL OF CONTACT:
0:BRASS

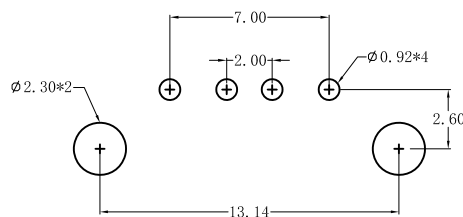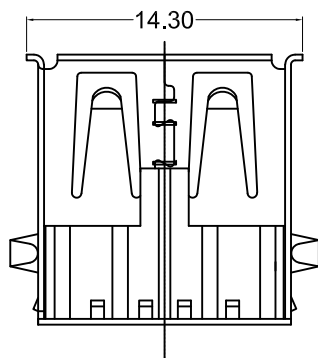

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
USB AF 90D
有蓋彎腳

單位: mm



比例:

公差: .X ±0.38
.XX ±0.25
.XXX ±0.13

日期: 2020/7/16

繪圖

DRAWING

設計

DESIGNED

審核

CHECKED BY

核准

APPROVAL BY

料號: KUAD45-4XP2X0

PART NUMBER

圖號: KUAD45-4XP2X0-1

DRAWING NO

版本: REV. 0

版本

修改事項

修改日期