
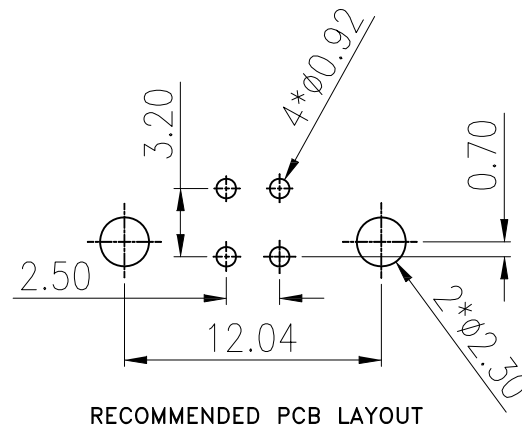
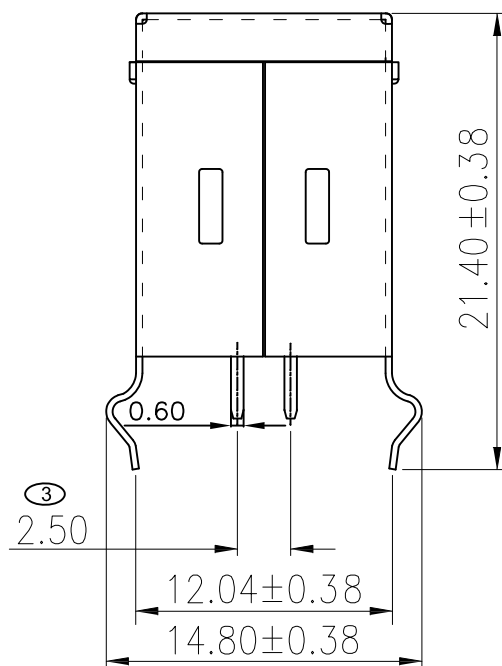
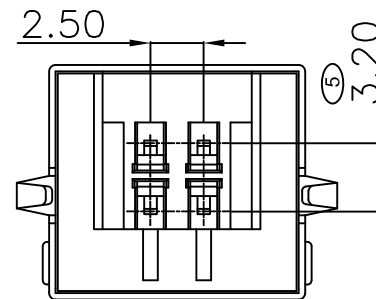
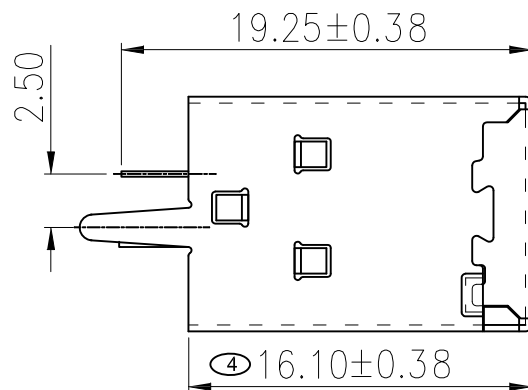


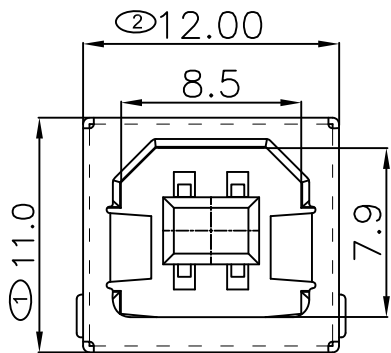

规格说明: Specifications:
电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触电阻: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)

PRODUCT NUMBER CODE

KUBD72 - 4 WP 2 X 0

① ② ③ ④ ⑤ ⑥

1. PRODUCT CODE:
KUBD72: USB B TYPE PLUG CONN.
2. POSITIONS:
4:4 POSITIONS
3. INSULATOR COLOR OR HOUSING:
WP: WHITE PBT
4. CONTACT PLATING THICKNESS:
2: CONTACT PLATED G/F IN MATING AREA
5. SHELL PLATING:
1: SPCC PLATED NICKEL
2: COPPER ALLOY PLATED NICKEL
6. MATERIAL OF CONTACT:
0: BRASS

※ SIGN "X" IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

USB B/F 180°DIP弯脚

單位: mm	繪圖	設計	審核	核准	料號: KUBD72-4WP2X0
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KUBD72-4WP2X0-1
日期: 2023/7/31					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0