


1 2 3 4 5 6 7 8 9

A

A

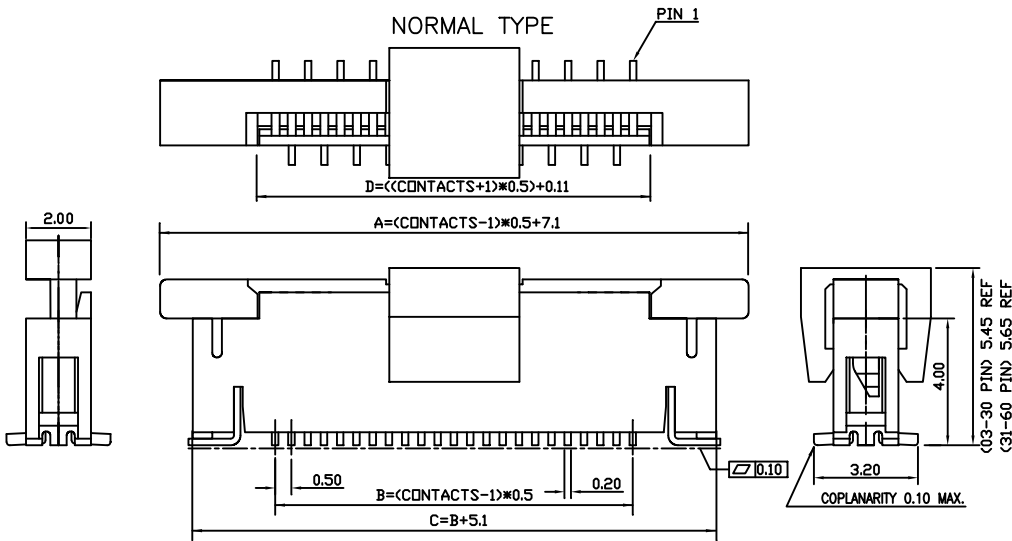

FEATURE AND SPECIFICATIONS

SIZES 03 TO 60 PIN.
FOR 0.3mm THICKNESS FFC/FPC.
VOLTAGE:50V MAX.
CURRENT:0.5A MAX.
CONTACT RESISTANCE:20 milliohms MAX.
INSULATION RESISTANCE:50 Megohms MIN.
DIELECTRIC WITHSTANDING VOLTAGE:250V AC.
TEMPERATURE:-40°C TO 85°C

MATERIAL AND FINISH




HOUSING:SEE ORDERING CODE
ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
CONTACT:PHOSPHOR BRONZE. PLATING:SEE ORDERING CODE
HOLDDOWN:BRASS. PLATING:SEE ORDERING CODE

B

B

C

C

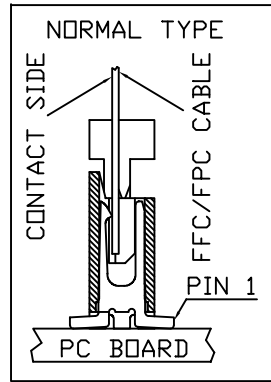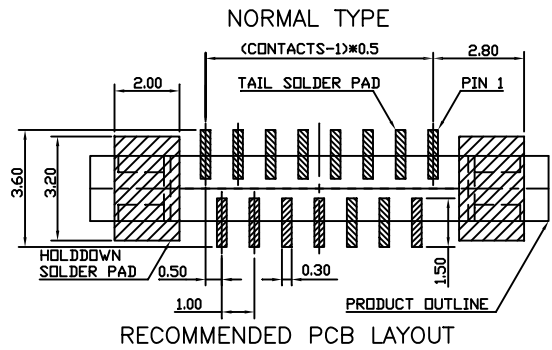

PART NO.:

HCO121 - XX 2 X X
① ② ③

- ①XX: NO. OF CONTACTS 03P~60P
- ②X: TERMINAL PLATING:
L: TIN
G: GOLD
- ③X: PACKING MODE:
3: TUBE
4: TAPE & REEL

D

D

E

E

F

F

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
FPC P:0.5mm / body 2.0mm

單位 : mm	繪圖	設計	審核	核准
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES
日期 : 2010/6/27				
版本	修改事項	修改日期		

料號:HCO121-XX2XX
PART NUMBER
圖號:HCO121-XX2XX-1
DRAWING NO
版本: REV. 0

1 2 3 4 5 6 7 8 9