


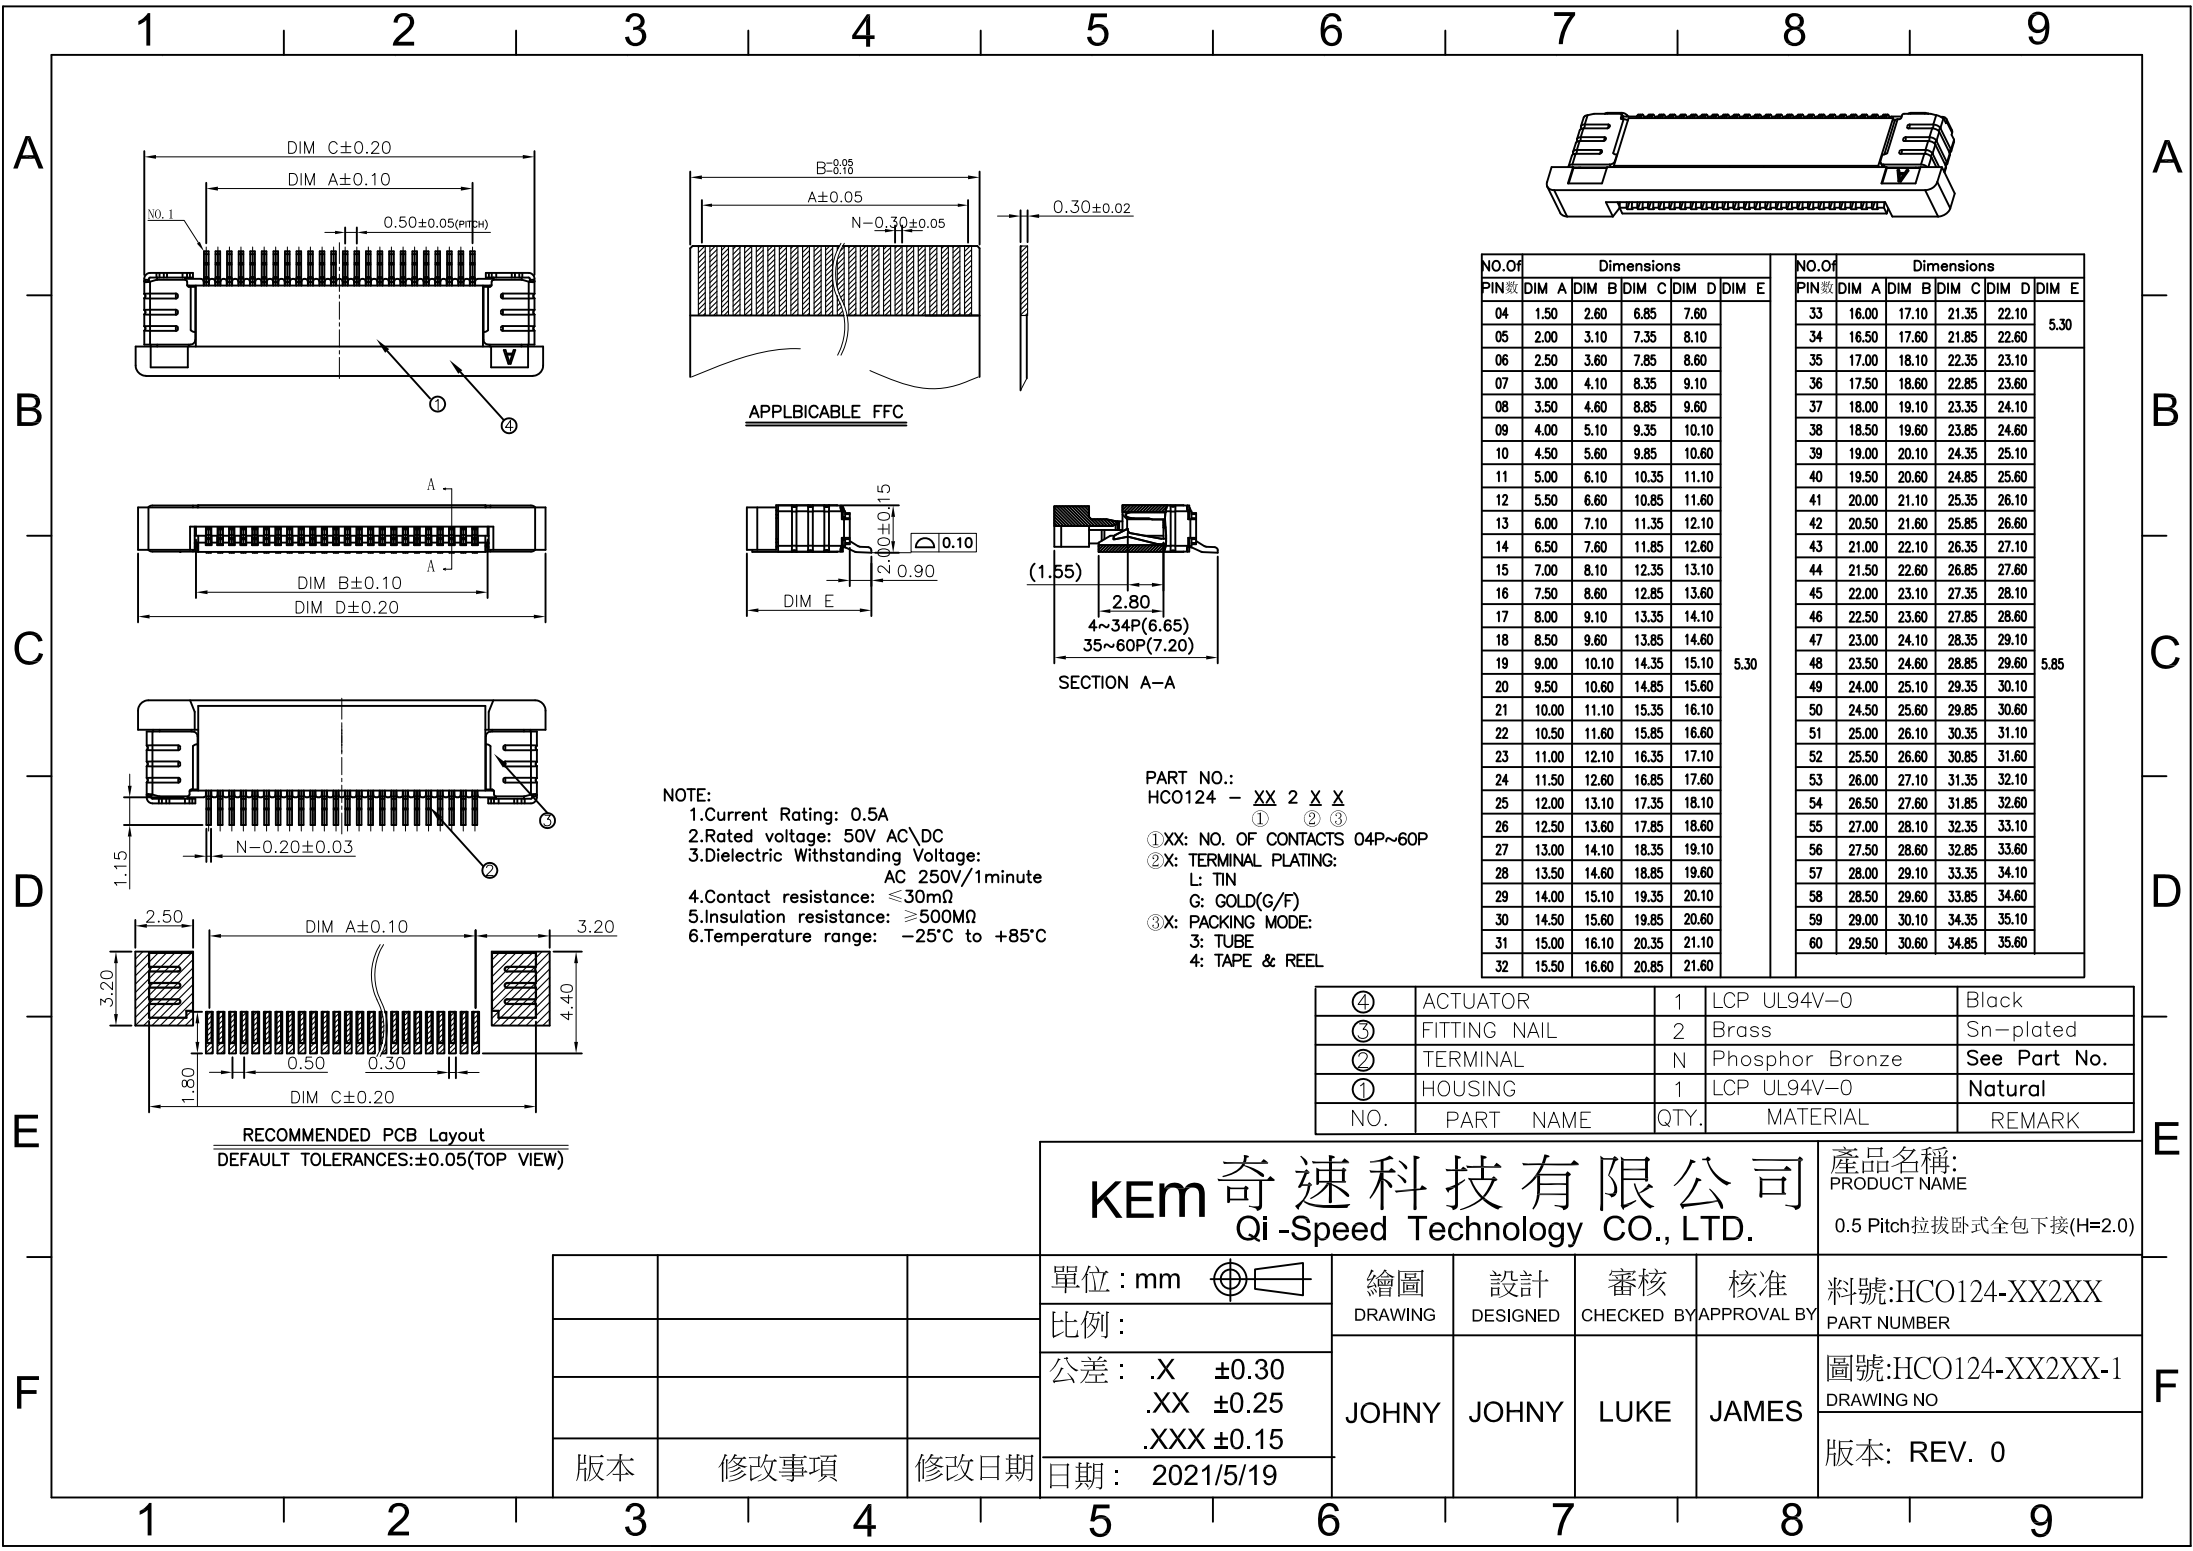

- NOTE:
- 1.Current Rating: 0.5A
 - 2.Rated voltage: 50V AC\DC
 - 3.Dielectric Withstanding Voltage: AC 250V/1minute
 - 4.Contact resistance: $\leq 30m\Omega$
 - 5.Insulation resistance: $\geq 500M\Omega$
 - 6.Temperature range: $-25^{\circ}C$ to $+85^{\circ}C$

PART NO.:
HCO124 - XX 2 X X
① XX: NO. OF CONTACTS 04P~60P
② X: TERMINAL PLATING:
L: TIN
G: GOLD(G/F)
③ X: PACKING MODE:
3: TUBE
4: TAPE & REEL

NO.Of		Dimensions						NO.Of		Dimensions					
PIN数		DIM A	DIM B	DIM C	DIM D	DIM E		PIN数		DIM A	DIM B	DIM C	DIM D	DIM E	
04	1.50	2.60	6.85	7.60			5.30	33	16.00	17.10	21.35	22.10			5.30
05	2.00	3.10	7.35	8.10				34	16.50	17.60	21.85	22.60			
06	2.50	3.60	7.85	8.60				35	17.00	18.10	22.35	23.10			
07	3.00	4.10	8.35	9.10				36	17.50	18.60	22.85	23.60			
08	3.50	4.60	8.85	9.60				37	18.00	19.10	23.35	24.10			
09	4.00	5.10	9.35	10.10				38	18.50	19.60	23.85	24.60			
10	4.50	5.60	9.85	10.60				39	19.00	20.10	24.35	25.10			
11	5.00	6.10	10.35	11.10				40	19.50	20.60	24.85	25.60			
12	5.50	6.60	10.85	11.60				41	20.00	21.10	25.35	26.10			
13	6.00	7.10	11.35	12.10				42	20.50	21.60	25.85	26.60			
14	6.50	7.60	11.85	12.60			5.85	43	21.00	22.10	26.35	27.10			5.85
15	7.00	8.10	12.35	13.10				44	21.50	22.60	26.85	27.60			
16	7.50	8.60	12.85	13.60				45	22.00	23.10	27.35	28.10			
17	8.00	9.10	13.35	14.10				46	22.50	23.60	27.85	28.60			
18	8.50	9.60	13.85	14.60				47	23.00	24.10	28.35	29.10			
19	9.00	10.10	14.35	15.10				48	23.50	24.60	28.85	29.60			
20	9.50	10.60	14.85	15.60				49	24.00	25.10	29.35	30.10			
21	10.00	11.10	15.35	16.10				50	24.50	25.60	29.85	30.60			
22	10.50	11.60	15.85	16.60				51	25.00	26.10	30.35	31.10			
23	11.00	12.10	16.35	17.10				52	25.50	26.60	30.85	31.60			
24	11.50	12.60	16.85	17.60				53	26.00	27.10	31.35	32.10			
25	12.00	13.10	17.35	18.10				54	26.50	27.60	31.85	32.60			
26	12.50	13.60	17.85	18.60				55	27.00	28.10	32.35	33.10			
27	13.00	14.10	18.35	19.10				56	27.50	28.60	32.85	33.60			
28	13.50	14.60	18.85	19.60				57	28.00	29.10	33.35	34.10			
29	14.00	15.10	19.35	20.10				58	28.50	29.60	33.85	34.60			
30	14.50	15.60	19.85	20.60				59	29.00	30.10	34.35	35.10			
31	15.00	16.10	20.35	21.10				60	29.50	30.60	34.85	35.60			
32	15.50	16.60	20.85	21.60											

④	ACTUATOR	1	LCP UL94V-0	Black
③	FITTING NAIL	2	Brass	Sn-plated
②	TERMINAL	N	Phosphor Bronze	See Part No.
①	HOUSING	1	LCP UL94V-0	Natural
NO.	PART NAME	QTY.	MATERIAL	REMARK

KEM奇速科技有限公司

Qi-Speed Technology CO., LTD.

單位 : mm

比例 :

公差 :
.X ±0.30
.XX ±0.25
.XXX ±0.15

日期 : 2021/5/19

繪圖
DRAWING

設計
DESIGNED

審核
CHECKED BY

核准
APPROVAL BY

料號:HCO124-XX2XX

PART NUMBER

圖號:HCO124-XX2XX-1

DRAWING NO

版本: REV. 0

產品名稱:
PRODUCT NAME
0.5 Pitch拉拔卧式全包下接(H=2.0)

版本	修改事項	修改日期
----	------	------