
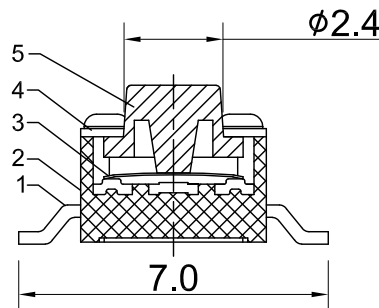
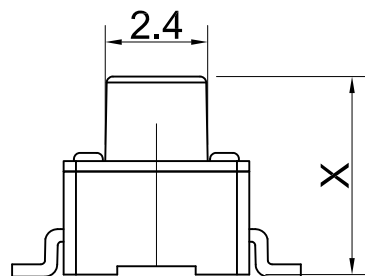

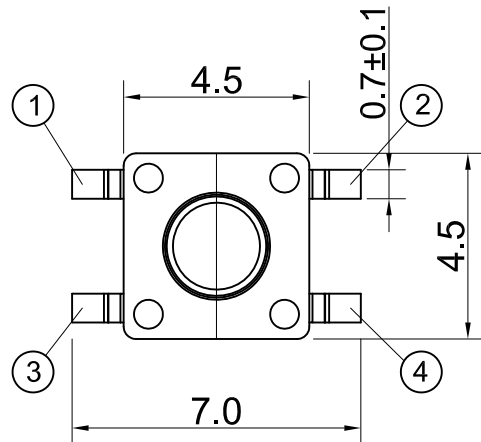



PCB LAYOUT

PART NO.:
KTSTP45-H X - X
 (A) (B)

(A)	(B)
3.8	160g
4.3	250g
4.5	
5.0	
6.0	
6.5	
7.0	
8.0	



Circuit diagram

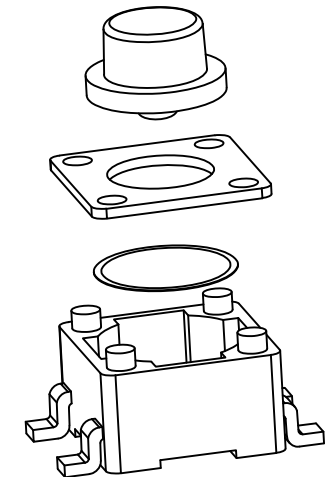

SPECIFICATION

- 1.Rated current 、 Voltage ： DC 12V 50mA ；
- 2.Contact resistance ： ≤50MΩ ；
- 3.Insulation resistance ： ≥100MΩ ；
- 4.Withstand voltage ： AC 250V 50HZ 1Min ；
- 5.The intensity of operations ： 160±50gf / 250±50gf;
- 6.life test ： 100,000 cycles 。

5	BUTTON	1	PPA	BLACK
4	COVER	1	BRASS	Ni-Plating
3	Shrapnel	1	SUS	Ag-Plating
2	HOUSING	1	PPA	BLACK
1	TERMINAL	4	BRASS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
TACT SWITCH 4.5*4.5

單位 : mm	繪圖	設計	審核	核准	料號:KTSTP45-HX-X
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KTSTP45-HX-X-1
日期 : 2022/3/29					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0