

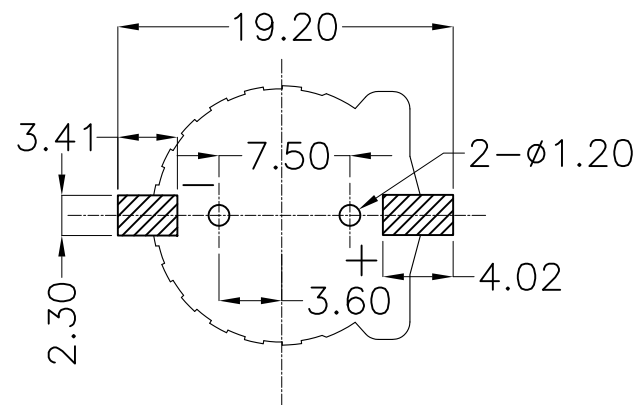
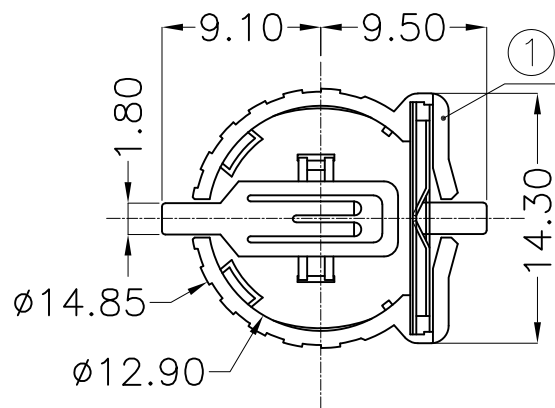


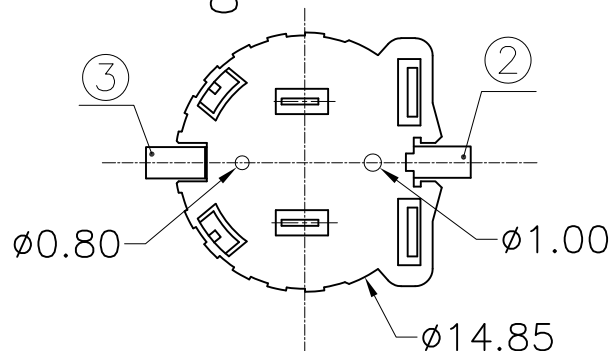

PCB Layout Diagram
Top View

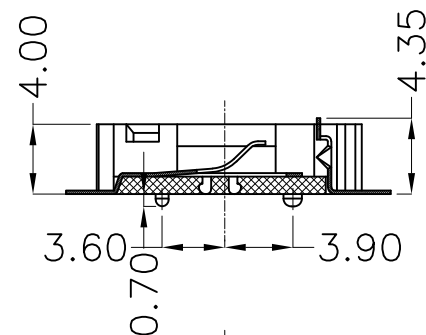

1.MATERIAL:

- a.HOUSING:PPS UL94V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Au1u")

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -55°C~ +85°C

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPS	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
CR1220 電池座 SMT

單位 : mm	繪圖	設計	審核	核准	料號:KCR1220SA-021G
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KCR1220SA-021G-1 DRAWING NO
日期 : 2017/6/28					版本: REV. 0

版本	修改事項	修改日期