



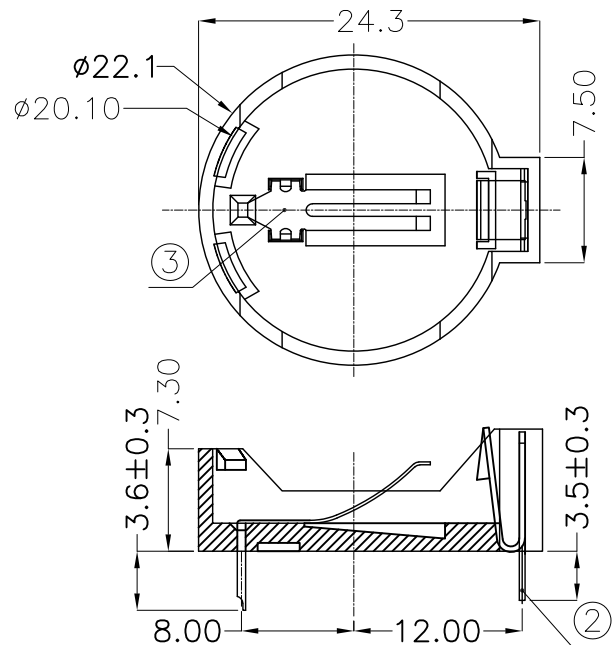

PCB Layout Diagram
Top View

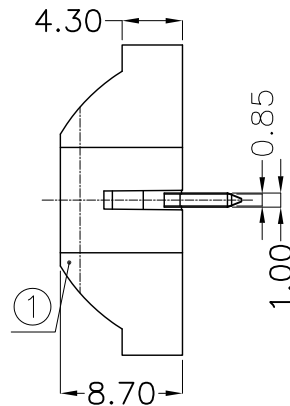

NOTE:

1.MATERIAL:

a.HOUSING:PBT

b.CONTACT:BRASS

(SURFACE PLATING:Sn=100u"-120u")

2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C~ +85°C

3	TERMINAL(-)	1	BRASS, T=0.20mm	Sn Plating
2	TERMINAL(+)	1	BRASS, T=0.40mm	Sn Plating
1	HOUSING	1	PBT	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

電池座

單位: mm	繪圖	設計	審核	核准	料號:KCR2032BS-2
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KCR2032BS-2-1
日期: 2021/10/12					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0