

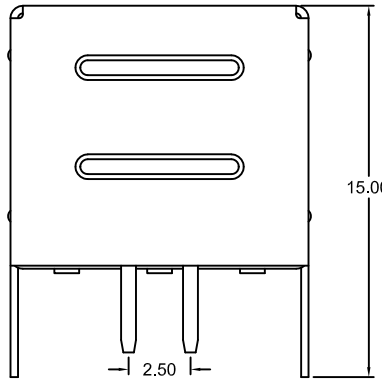
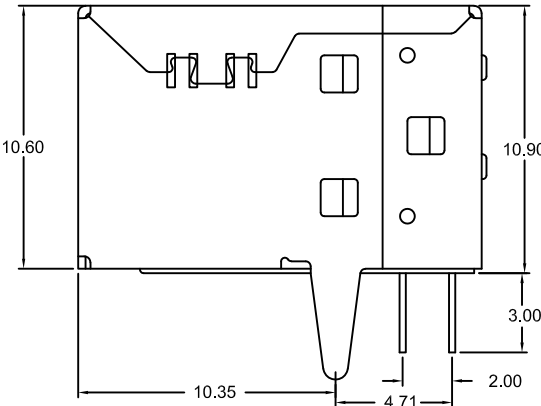
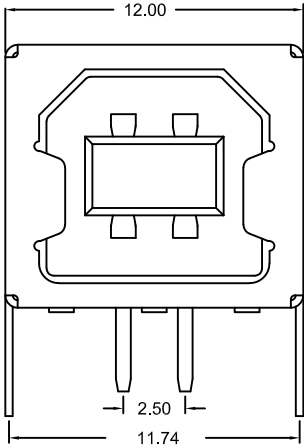


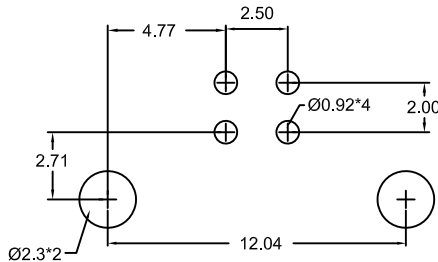

规格说明:Specifications:
电气特性:Electrical:
1.额定电流 : Current Rating
1.5A/contact terminal
2.额定电压 : Voltage Rating
30V DC
3.接触阻抗:Contact Resistance
30 milliohms MAX
4.耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5.绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

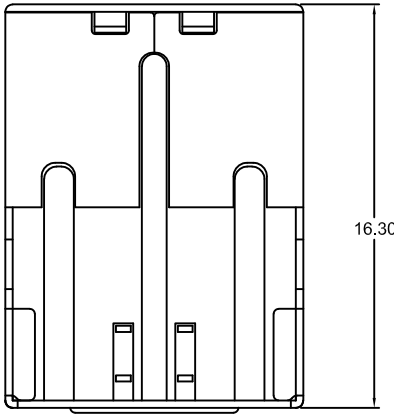

PRODUCT NUMBER CODE

KUBD73A - 4 WP 2 X 0

- ① ② ③ ④⑤⑥
- PRODUCT CODE:
KUBD73: USB B TYPE PLUG CONN.
 - POSITIONS:
4:4 POSITIONS
 - INSULATOR COLOR OR HOUSING:
WP:WHITE PBT UL94V-0
 - CONTACT PLATING THICKNESS:
2:CONTACT PLATED G/F IN MATING AREA
 - SHELL PLATING:
1:SPCC PLATED NICKEL
2:C2680 PLATED NICKEL
 - MATERIAL OF CONTACT:
0:BRASS

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
USB BF 90° DIP直腳

			單位 : mm	繪圖	設計	審核	核准	料號:KUBD73A-4WP2X0
			比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
			公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KUBD73A-4WP2X0-1 DRAWING NO
版本	修改事項	修改日期	日期 : 2023/3/2					版本: REV. 0